
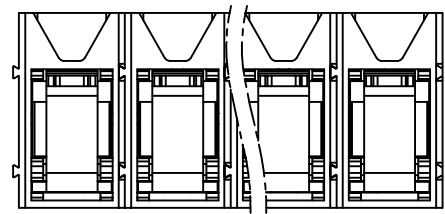
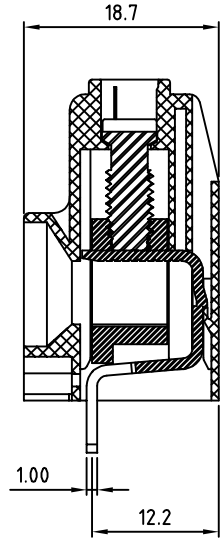
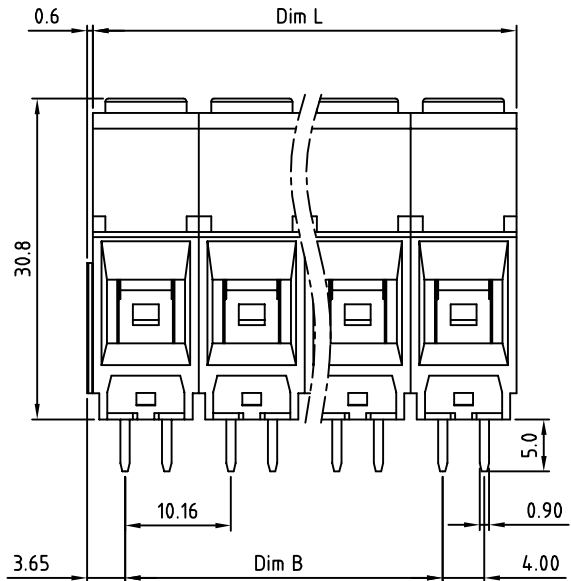
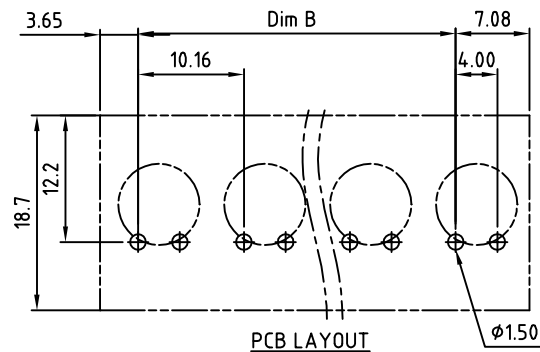


SIGN	DATE	DESCRIPTION	APPROVER
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

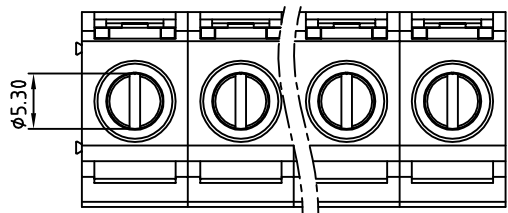

- Material:**
- Insulator(housing):Thermoplastic (UL 94V-0)
  - Metal housing: Brass, Ni plated.
  - Contacts(Front single row):Brass Tin plated
  - Terminal screw: Steel Zinc plating"-slot type
- Electrical**
- Voltage rating : 600V
  - Current rating : 60A
  - Wire range :  
Solid wire (AWG) : 6-20  
Stranded wire (AWG) : 6-20
  - Torque (LB-In.) : 19
  - Screw : M4.5
  - Wire strip length : 10~11mm
  - Withstanding voltage : 2.2KV
  - Operating temperature : -40°C+115°C
  - Soldering temperature : 250°C+10°C/5 Sec

RoHS Compliant

PART NUMBER:

**OSTKPXX2152**

- |              |                     |
|--------------|---------------------|
| No. of Poles | COLOR               |
| 02 2 Poles   | 0: Black            |
| 03 3 Poles   | 5: Green (Standard) |
| ... ..       | 6: Blue             |
| 12 12 Poles  | 8: Grey             |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



Poles	01	02	03	04	05	06	07	08	09	10	11	12
Dim L	10.16	20.32	30.48	40.64	50.80	60.96	71.12	81.28	91.44	101.60	111.76	121.92
Dim B		10.16	20.32	30.48	40.64	50.80	60.96	71.12	81.28	91.44	101.60	111.76
TOL	±0.10	±0.20		±0.30		±0.35		±0.40				

TITLE		OSTKP 10.16 Series Front single row (without cover)										
PART NO.		OSTKPXX2152					DWG NO.		OSTKPXX2152.DWG			
APPROVED		CHECKED	DESIGNED	DRAWN		CUST NO.		Tolerance				
			Jacke	Jacke					UNIT: mm		X.	±0.50
			2009.07.28	2009.07.28					SCALE: NONE		X.X	±0.30
									SHEET: 01/01		X.XX	±0.10
									REV.: B		X°	±1°