

SIGN	DATE	DESCRIPTION	APPROVER
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

**Material**

- Insulating body: Thermoplastic ( UL94V-0 )
- Insulating cover: Thermoplastic ( UL94V-0 )
- Contact: Brass, Tin plated
- Wire guard: PhBz ,Tin plated
- Terminal screw :Steel Cr3+ Zinc plating "-" slot type

**Electrical**

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:  
Solid wire(AWG): 14-30  
Stranded wire(AWG): 14-30
- Torque(Lb-In): 2
- Screw: M2
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec

RoHS Compliant

PART NUMBER:

**OSTVRXX5152**




No. of Poles

- 02 2 Poles
- 03 3 Poles
- ... ..
- 24 24 Poles


COLOR

- 0: Black
- 5: Green (Standard)
- 6: Blue
- 8: Grey

Poles	02	03	04	05	06	07	08	09
Dim L	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00
Dim B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00
TOL	±0.15							
Poles	10	11	12	13	14	15	16	17
Dim L	50.00	55.00	60.00	65.00	70.00	75.00	80.00	85.00
Dim B	45.00	50.00	55.00	60.00	65.00	70.00	75.00	80.00
TOL	±0.25							
Poles	18	19	20	21	22	23	24	
Dim L	90.00	95.00	100.0	105.0	110.0	115.0	120.0	
Dim B	85.00	90.00	95.00	100.0	105.0	110.0	115.0	
TOL	±0.35							

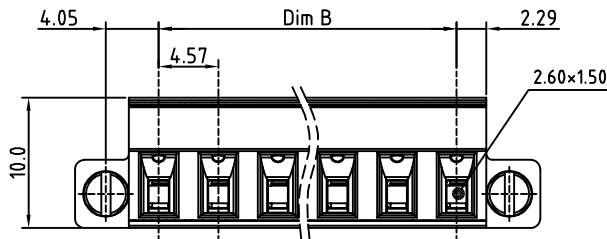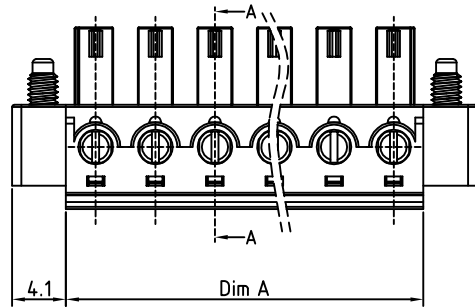

SECTION A-A

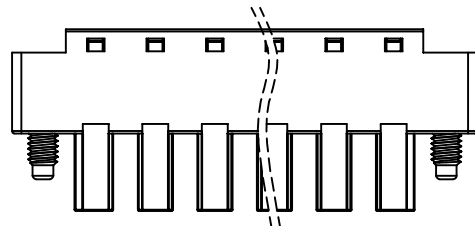

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTVR 5.08 Series w/flange (contact on down side)					
PART NO.	OSTVRXX5152	DWG NO.	OSTVRXX5152.DWG				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Aaron 2007.07.23	Aaron 2007.07.23		UNIT: mm	X. ±0.50	
					SCALE: NONE	X.X ±0.30	
					SHEET: 01/01	X.XX ±0.10	
					REV: A1	X° ±1°	