

1

2

3

4






5

Specifications:
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Insulation Resistance:1000M Ohm Min.
 Withstanding Voltage:1000V AC/Minute
 Operating Temperature Range:-40°C To +105°C

Material and Finish:
 Insulator:Thermoplastic (UL94V-0)
 Insulator Color:Beige

How To Order
 2510-XX



No. of Contacts

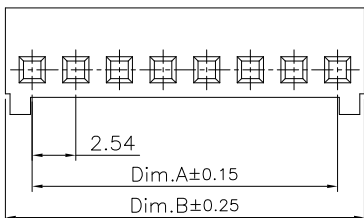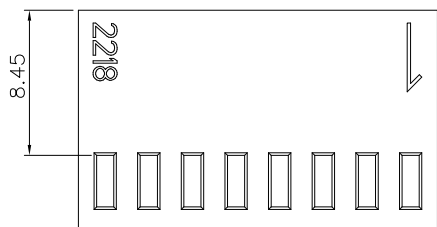

Dimension Information:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
02	2.54	5.60	09	20.32	23.40
03	5.08	8.10	10	22.86	25.90
04	7.62	10.70	11	25.40	28.50
05	10.16	13.20	12	27.94	31.00
06	12.70	15.80	13	30.48	33.50
07	15.24	18.30	14	33.02	36.10
08	17.78	20.90	15	35.56	38.60

RoHS Compliant

F				DRAWN: Lucy Du	GENERAL TOLERANCE: .X=±0.25 .XX=±0.15	 ON-SHORE TECHNOLOGY, INC.	DESCRIPTION: 2.54mm Wire To Board Housing	SIZE
E								
D				CHECKED: Jerry Chen	UNIT: MM	PART NO: 2510-XX		
C					SCALE: 1:1			
B				APPROVAL: Rory Chen	SHEET: 1/1			
A	11-Jan-2024		Lucy Du		PROJECTION: 			
REV	DATE	FILE	BY					