



02~05 Pin

Dimension Information:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
02	2.54	5.08	09	20.32	22.86	16	38.10	40.64
03	5.08	7.62	10	22.86	25.40	17	40.64	43.18
04	7.62	10.16	11	25.40	27.94	18	43.18	45.72
05	10.16	12.70	12	27.94	30.48	19	45.72	48.26
06	12.70	15.24	13	30.48	33.02	20	48.26	50.80
07	15.24	17.78	14	33.02	35.56			
08	17.78	20.32	15	35.56	38.10			

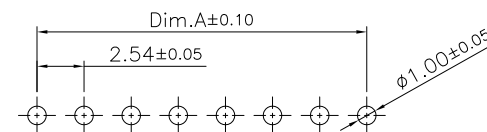

P.C.B Layout



Specifications:

Current Rating: 3.0A AC/DC  
 Voltage Rating: 250V AC/DC  
 Contact Resistance: 20m Ohm Max  
 Insulation Resistance: 1000M Ohm Min.  
 Withstanding Voltage: 1000V AC/Minute  
 Operating Temperature Range: -40°C To +105°C

Material and Finish:

Insulator: Thermoplastic (UL94V-0)  
 Insulator Color: Beige  
 Contact: Copper Alloy  
 Plating: Gold/Bright Tin Plated

How To Order

2600-XX-RXX

- Blank: Bright Tin Plated
- G:Gold Plated
- Blank: Beige
- W: White
- No. of Contacts

RoHS Compliant

F				DRAWN: Lucy Du	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		ON-SHORE TECHNOLOGY, INC.	
E								
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Wire To Board Wafer R/A Type		SIZE
C					SCALE: 1:1			
B				APPROVAL: Lucy Du	SHEET: 1/1	PART NO: 2600-XX-R		D
A	11-Jan-2024				Rory Chen			
REV	DATE	FILE	BY					