


△ Specifications:
 Current Rating:5.0A AC/DC #22AWG
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. max.
 Withstanding Voltage:1,500V AC/minute
 Operating Temperature Range:-25°C~+105°C △
 Application Wires:AWG 20-24 or 26-30
 Insulation O.D:AWG 20~24 1.85mm(Max)
 AWG 26~30 1.27mm(Max)
 Mates With 300P Series Housing

Material and Finish
 Contact:Phosphor Bronze
 Finish:Tin/Gold/Selective Gold Plated

How To Order
 300P-T-XX-XXXX-X-X △
 Blank With Serial
 L:Loose
 Blank M=0.59mm
 △ A:M=0.54mm(Use For Under 4 Pin)
 Blank Wire Size 20-24
 2630:Wire Size 26-30
 Blank Phosphor Bronze
 BS:Brass
 Blank Tin Plated
 G:Gold Plated
 △ SG:Selective gold plated
 SG15:Selective Gold Plated 15u" △
 SG30:Selective Gold Plated 30u" △

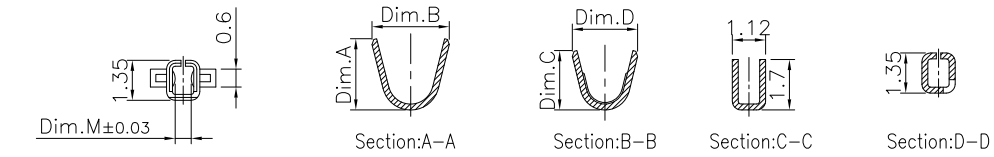


Part No.	Dim.M
300PT-XX-XXXX	0.59
300P-T-XX-XXXX-A	0.54

WIRE SIZE	Dim.A	Dim.B	Dim.C	Dim.D
20-24	2.4	2.6	2.0	2.2
26-30	1.91	2.10	1.47	1.65

RoHS Compliant

K	28-NOV-2022	△ K	SELIN
J	14-AUG-2020	△ J	Jamie
I	04-MAR-2020	TW200002	Vito
H	21-FEB-2020	△ H	Romina Wu
G	09-JUL-2019	Mark Tin Plated Area	Romina Wu
A	04-DEC-2013		Dennis Lin
REV.	DATE	FILE	BY

DRAWN: Dennis Lin	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
CHECKED: Jerry Chen	UNIT: MM
APPROVAL: Mike Wu	SCALE:
	SHEET: 1/1
	PROJECTION: ⊕

 ON-SHORE TECHNOLOGY, INC.		DESCRIPTION: 3.0mm Wire To Board Terminal	SIZE
PART NO:	300P-T	△	