
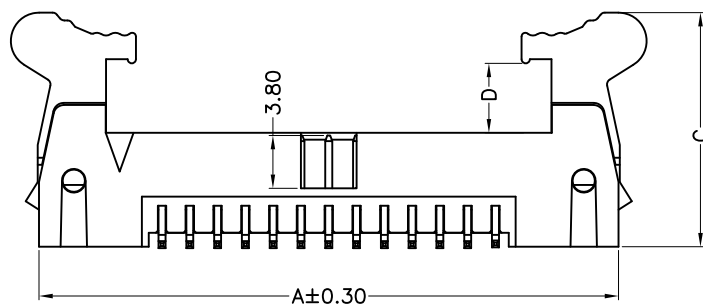


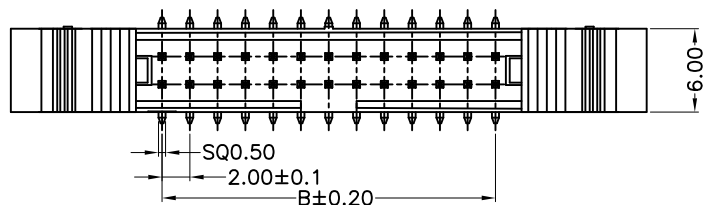


Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
10	25.70	8.00	30	45.70	28.00
12	27.70	10.00	34	49.70	32.00
14	29.70	12.00	40	55.70	38.00
16	31.70	14.00	44	59.70	42.00
20	35.70	18.00	50	65.70	48.00
22	37.70	20.00	60	75.70	58.00
24	39.70	22.00	68	83.70	66.00
26	41.70	24.00			

Dimension:

Part No	Dim.C	Dim.D
401-SS-S	16.85	5.0
401-LS-S	20.05	8.2



Specifications:

Current Rating:2.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:500V AC For One Minute
Operating Temperature Range:-40°C To +105°C
Materials:

Insulator:High Temp. Plastic(Nylon 6T UL94V-0)

Insulator Color:Black


Contact:Copper Alloy

Plating:Gold Plated

How To Order


401-XSXXX-S

1:Gold Plated
5:Tin Plated
6:Selective Gold Plated
No. Of Positions
S:Short latch
L:Long latch

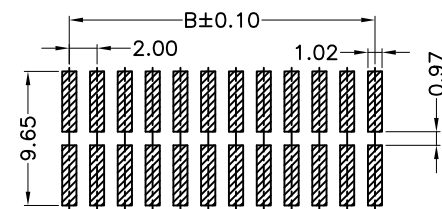

P.C.B Layout

RoHS Compliant



F				DRAWN:	GENERAL TOLERANCE:	 ON-SHORE TECHNOLOGY, INC.	
E				Richie	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION: 2.0mm Shrouder Header SMD Ejector Type	
C				Jeremy Liu	SCALE: 1:1		
B	09-Nov-2011		Andrew	APPROVAL:	SHEET: 1 / 1	PART NO: 401-XS-S	
A	31-Mar-2009	(PC0001)	Richie	Mike Wu	PROJECTION:		
REV	DATE	FILE	BY				