
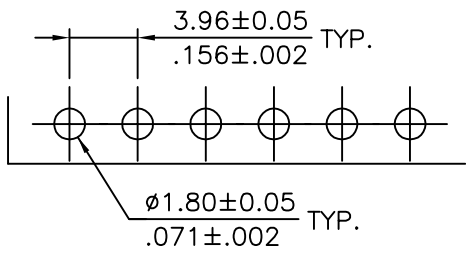
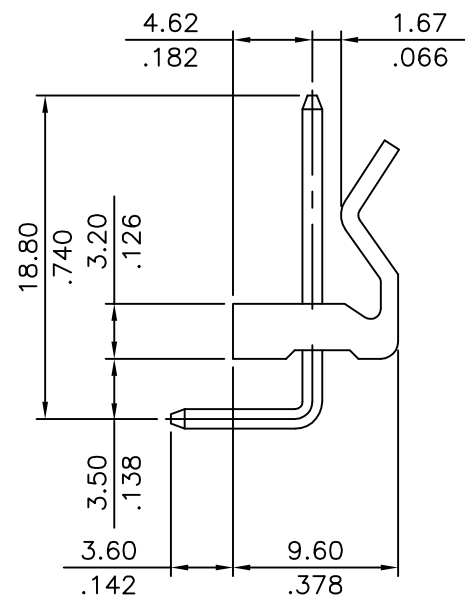


SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

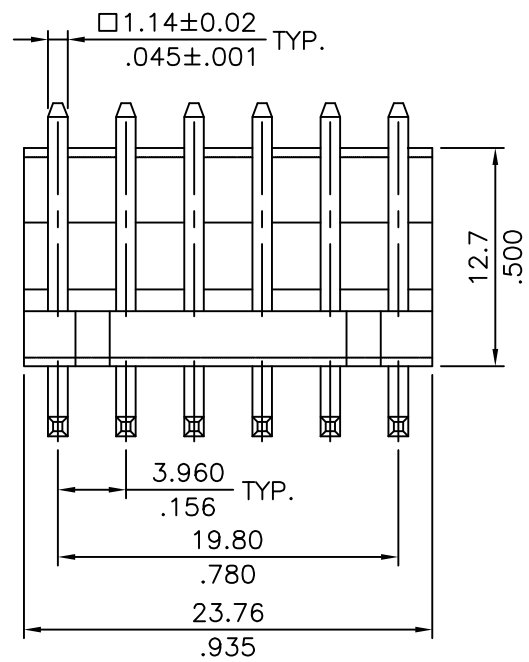

Recommended P.C. Board Layout

Material

- Body: Nylon 66, UL 94V-2
- Color: Natural (Translucent)
- Packaging: Bulk
- Plating: 3.05um(120u") Min. Tin over 0.76um(30u") Nickel
- Contact: Brass

Electrical

- Current: 6A
- Voltage: 250V AC(r.m.s.)
- Dielectric Withstanding: 1500 VAC for one minute
- Insulation Resistance: >1000 Mohms
- Contact Resistance: <20 mohms
- Operating Temperature: -25°C ± 85°C

RoHS Compliant

PART NUMBER:

8673-XX-R

Number of Circuits (02-20)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		8673 Series - 3.96mm vertical friction lock, right/angle			
PART NO.	8673-XX-R			DWG NO.	8673-XX-R.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	4050	
Shi Jun 2006.05.29	Marvin 2006.05.29	Marvin 2006.05.29	Marvin 2006.05.29	Tolerance	
					UNIT: mm/inch
					SCALE: NONE
				SHEET: 01/01	REV: A
				X ± 0.38/.015	
				.XX ± 0.25/.010	
				.XXX ± 0.10/.004	