


Specifications:
 Current Rating:7.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:10m Ohm Max
 Insulation Resistance: 1000M ohm. min.
 Withstanding Voltage: 1500V For One Minute
 Operating Temperature Range: -40°C ~ +85°C

Material and Finish
 Insulator: Thermoplastic UL94V-0
 Insulator Color: White
 Contact: Copper Alloy
 Plated: Bright Tin/Gold Plated

How To Order
 8673-XX-SX
 Blank: Bright Tin plated
 G:Gold Plated
 No. of Contacts

Dimension Information:

Pos	Dim.A	Dim.B	Pos	Dim.A	Dim.B
2	3.96	7.92	8	27.72	31.68
3	7.92	11.88	9	31.68	35.64
4	11.88	15.84	10	35.64	39.60
5	15.84	19.80	11	39.60	43.56
6	19.80	23.76	12	43.56	47.52
7	23.76	27.72	13	47.52	51.48

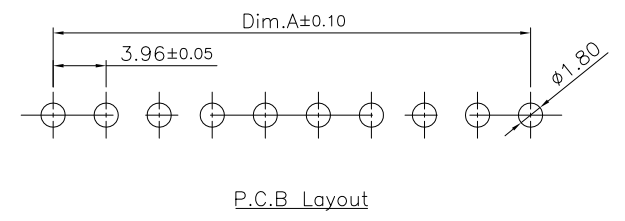

RoHS Compliant

F				DRAWN:	Lucy Du	GENERAL TOLERANCE:	ON-SHORE TECHNOLOGY, INC.	
E				CHECKED:	Jerry Chen	.X=±0.20 .XX=±0.15		
D				APPROVAL:	Lucy Du	UNIT: MM	DESCRIPTION:	SIZE
C						SHEET: 1/1	3.96mm Wire to Board Wafer Straight Type	
B				Rory Chen	BY	SHEET: 1/1	PART NO:	8673-XX-S
A	11-Jan-2024	FILE				PROJECTION:		
REV	DATE	FILE	BY					