

SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	



Material

- Body: Nylon 66, UL 94V-2
- Color: Natural (Translucent)
- Packaging: Bulk
- Plating: 3.05um(120u") Min. Tin over 0.76um(30u") Nickel
- Contact: Brass



Electrical

- Current: 5A
- Voltage: 250V AC(r.m.s.)
- Dielectric Withstanding: 1500 VAC for one minute
- Insulation Resistance: >1000 Mohms
- Contact Resistance: <10 mohms
- Operating Temperature: -25°C ± 85°C

RoHS Compliant

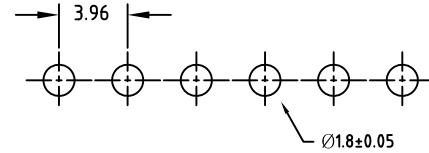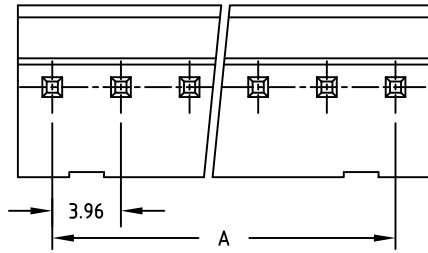

PCB LAYOUT COMPONENT SIDE

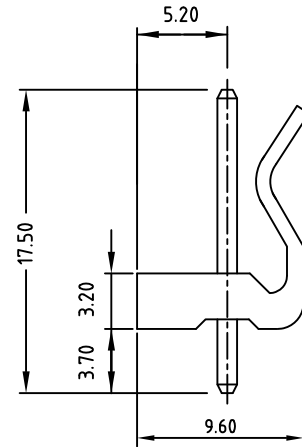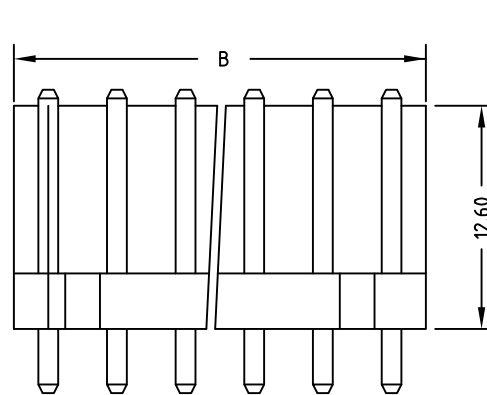

Poles	Dimension mm (in.)	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.86	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
20	75.24	79.20

PART NUMBER:

8673-XX-S

Number of Circuits (02-20)



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		8673 Series - 3.96mm vertical friction lock, straight			
PART NO.	8673-XX-S	DWG NO.	8673-XX-S.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	4050	
Shi Jun 2006.05.29	Marvin 2006.05.29	Marvin 2006.05.29	Marvin 2006.05.29	Tolerance	
					X ± 0.38/.015
					UNIT: mm/inch
				SCALE: NONE	.XXX ± 0.10/.004
				SHEET: 01/01	REV: A