


Dimension:

Contacts	DimA	DimB	DimC	Contacts	DimA	DimB	DimC
02	2.00	8.00	4.75	07	12.00	18.00	14.75
03	4.00	10.00	6.75	08	14.00	20.00	16.75
04	6.00	12.00	8.75	09	16.00	22.00	18.75
05	8.00	14.00	10.75	10	18.00	24.00	20.75
06	10.00	16.00	12.75				

Specifications:

Current Rating:2.0A AC,DC
 Voltage Rating:125V AC,DC
 Contact Resisitance:20m ohm.Max
 Insulation Resisitance:1000M ohm.Min
 Withstanding Voltage:500V AC/Minute
 Operating TemperatuRe range:-40°C~+85°C



Material and Finish:


Insulator:Nylon 46 (UL94V-0)
 Insulator Color:White
 Contact:Brass
 Plated:Tin Plated
 Package:500pcs/Reel

How To Order

CBCH11SR0XX15XX \triangle

TR:Tape&Reel
 Blank Tube \triangle \triangle

No. of Contacts

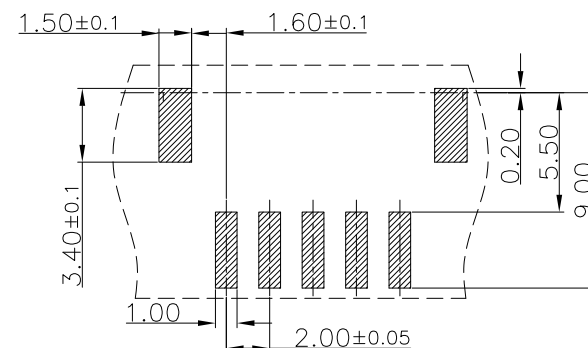

DRAWN:
Jamie Wang

GENERAL TOLERANCE:

.X=±0.20
.XX=±0.15



ON-SHORE TECHNOLOGY, INC.

CHECKED:
Jerry Chen

UNIT: MM

DESCRIPTION:
2.0mm Wire To Board Wafer R/A SMD Type

SIZE

APPROVAL:
Rory Chen

SCALE: 1:1

PART NO:

CBCH11SR0XX15XX \triangle \triangle

PROJECTION: \oplus \ominus

REV	DATE	FILE	BY
C	19-Feb-2020	\triangle	Romina Wu
B	05-Oct-2019	Add "Tube" Packing	Jamie Wang
A	26-Aug-2019		Jamie Wang