


Specifications:
 Current Rating: 2.0A AC/DC
 Voltage Rating: 100V AC/DC $\triangle B$
 Contact Resistance: 20m ohm. max.
 Insulation Resistance: 1,000M ohm. min.
 Withstanding Voltage: 800V For One Minute
 Operating Temperature Range: -25°C ~ +85°C

Material and Finish
 Insulator: Nylon 66 (UL94V-0)
 Contact: Copper Alloy
 Plated: Tin Plated

CBCH11TR0XX25BU

No. of Positions

Pos	DIM.A	DIM.B	Pos	DIM.A	DIM.B	Pos	DIM.A	DIM.B
2	6.04	2.00	9	20.08	16.00	16	34.14	30.00
3	8.04	4.00	10	22.10	18.00			
4	10.04	6.00	11	24.10	20.00			
5	12.04	8.00	12	26.12	22.00			
6	14.06	10.00	13	28.12	24.00			
7	16.06	12.00	14	30.14	26.00			
8	18.08	14.00	15	32.14	28.00			

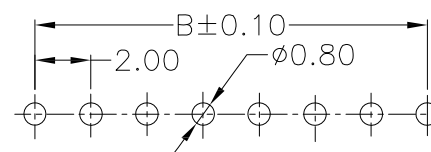

P.C.B. Layout

RoHS Compliant

G				DRAWN:	GENERAL TOLERANCE:	OST	ON-SHORE TECHNOLOGY, INC.
E				Allen	X.X = ±0.30 X.XX = ±0.20 $\triangle B$		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				Jerry Chen	SCALE:		
B	11-Jul-2014	ECN-TW1407004	Cherry	APPROVAL:	SHEET: 1 / 1	PART NO:	D
A	06-AUG-2008		Allen	Mike Wu	PROJECTION:		
REV	DATE	FILE	BY				