





1

2


3

4

5

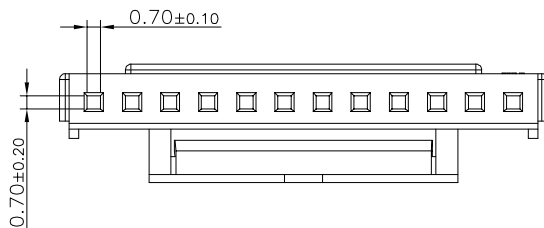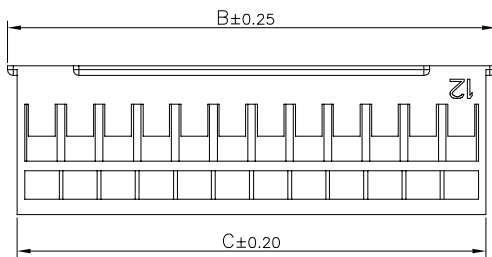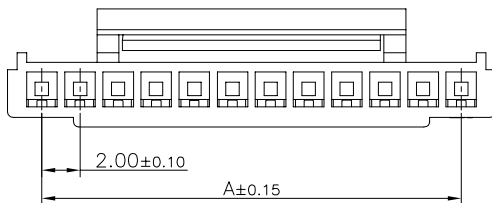

03P~16P



02P

Specifications:

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 1000V AC/Minute
 Operating Temperature Range: -25°C ~ +85°C

Material And Finish:


Insulator: Nylon 66(UL94V-0)

Part Mates With Neltron Part Numbers 2417SH Series
 Part Is For Use With Neltron Female Terminal 2418TH

How To Order

CPCP31XXBU



NO. Of Contacts



Dimension Information:

Pin.No	Dim.A	Dim.B	Dim.C	Pin.No	Dim.A	Dim.B	Dim.C
02	2.00	5.60	4.60	10	18.00	21.60	20.60
03	4.00	7.60	6.60	11	20.00	23.60	22.60
04	6.00	9.60	8.60	12	22.00	25.60	24.60
05	8.00	11.60	10.60	13	24.00	27.60	26.60
06	10.00	13.60	12.60	14	26.00	29.60	28.60
07	12.00	15.60	14.60	15	28.00	31.60	30.60
08	14.00	17.60	16.60	16	30.00	33.60	32.60
09	16.00	19.60	18.60				

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 ON-SHORE TECHNOLOGY, INC.	DESCRIPTION:	SIZE
E				MEI	.X=±0.25 .XX=±0.20			
D				CHECKED:	UNIT: MM	2.0mm Wire to Board Housing		
C				JERRY	SCALE:			
B				APPROVAL:	SHEET: 1/1	PART NO:		
A	03-JUN-2019		MEI	RORY	PROJECTION: 			CPCP31XXBU
REV	DATE	FILE	BY					