


Specifications:  
 Current Rating:1.0A AC/DC  
 Voltage Rating:12V AC/DC  
 Contact Resistance:20m ohm max  
 Insulation Resistance:100M ohm. min.  
 Withstanding Voltage:250V AC For one minute  
 Temperature Range:-40°C To +105°C

Material And Finish:  
 Insulator:High Temp. Plastic(UL94V-0)  
 Contact:Stainless Steel  
 Plating:Silver Plated

How To Order  
 DCJ-0210-XX

20 Ø2.0mm  
 25 Ø2.5mm

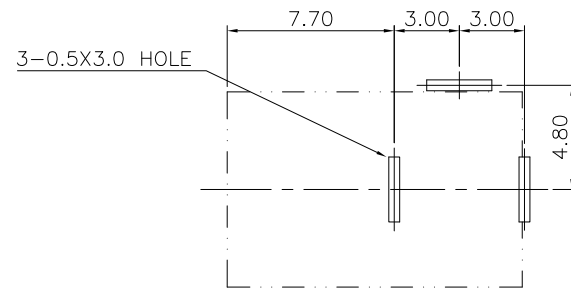

P.C.B Layout  
 (BOTTOM VIEW)

RoHS Compliant

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1
2	COVER	HIGH TEMPERATURE PLASTIC	BLACK	1
3	PIN	STAINLESS STEEL	NICKEL PLATED	1
4	TERMINAL A	STAINLESS STEEL	SILVER PLATED	1
5	TERMINAL B	STAINLESS STEEL	SILVER PLATED	1
6	TERMINAL C	STAINLESS STEEL	SILVER PLATED	1

F				DRAWN:	GENERAL TOLERANCE:	<b>OST</b>	ON-SHORE TECHNOLOGY, INC.
E				LUCY	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION: DC Power Jack	SIZE
C				JERRY	SCALE: 1:1		
B				APPROVAL:	SHEET: 1/1	PART NO: DCJ-0210-XX	
A	03-AUG-2016		LUCY	RORY	PROJECTION:		
REV	DATE	FILE	BY				