
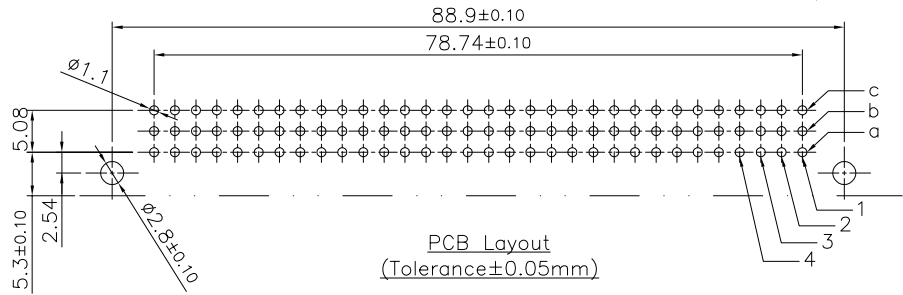
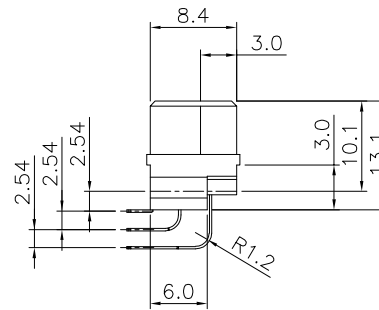


Specification
 Current Rating: 1.5 Amps Max.
 Contact Resistance: 30m Ohm Max
 Insulation Resistance: 1000M Ohms Min
 Withstanding Voltage: 1000V AC For One Minute
 Operating Temperature Range: -40°C TO +105°C



Material And Finish
 Insulator: Thermoplastic (UL94-0)
 Insulator Color: Beige
 Contact: Copper Alloy
 Plating: Selective Gold Plated

How To Order
 DINR-FXXS6

No. of Contacts 96

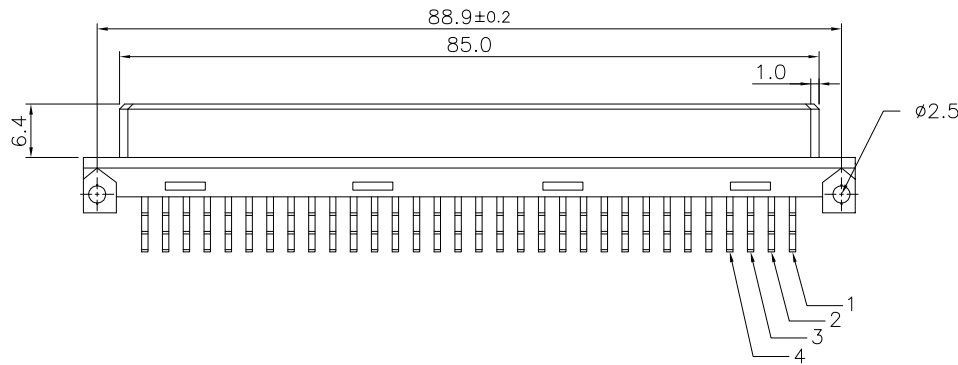

RoHS Compliant

F				DRAWN: Lucy Du	GENERAL TOLERANCE: .X=±0.30 .XX=±0.10	 ON-SHORE TECHNOLOGY, INC.	DESCRIPTION: 41612 DIN Connectors Socket Right Angle Type	SIZE A4
E								
D				CHECKED: Jerry Chen	UNIT: MM	PART NO: DINR-F96S6		
C					SCALE: 1:1			
B				APPROVAL: Rory Chen	SHEET: 1/1			
A	18-Aug-2020		Lucy Du		PROJECTION: 			
REV	DATE	FILE	BY					