SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

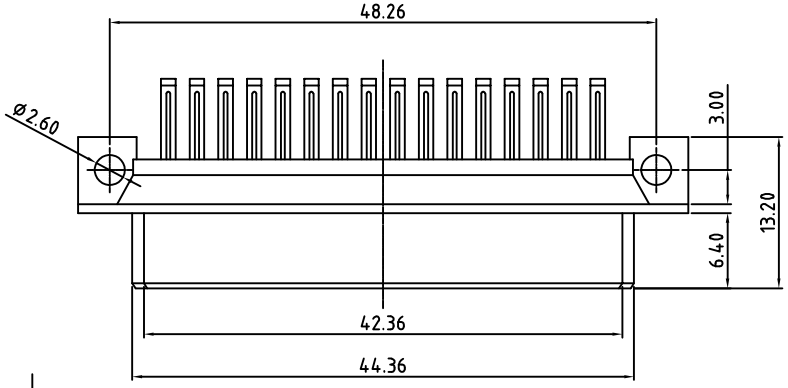

Material:

Housing: 30% Glass Filled PBT UL94V-0
Contacts: Phoshpor Bronze
Plating: Selective Flash Gold

Electrical Characteristics:

Current Rating: 2A
Dielectric Withstanding Voltage: AC 1000V For 1 minute
Insulator Resistance: 1000MΩ max. at DC 500V
Contact Resistance: 30MΩ max. at DC 100mA
Operating Temperature: −55°C~+105°C

ROHS Compliant

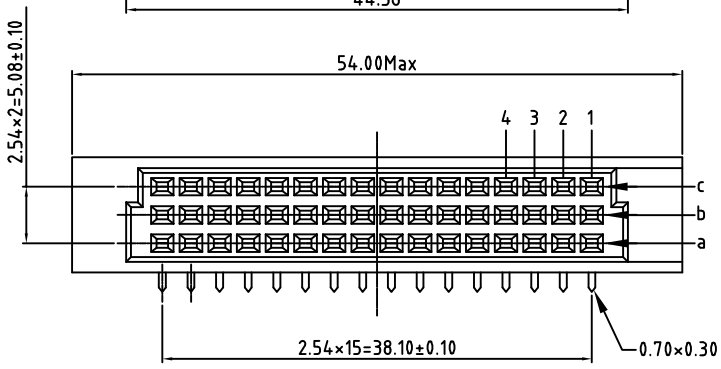

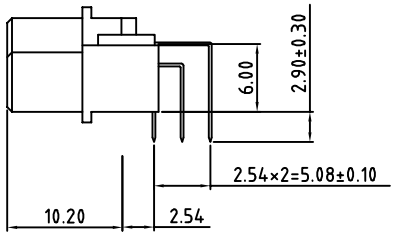

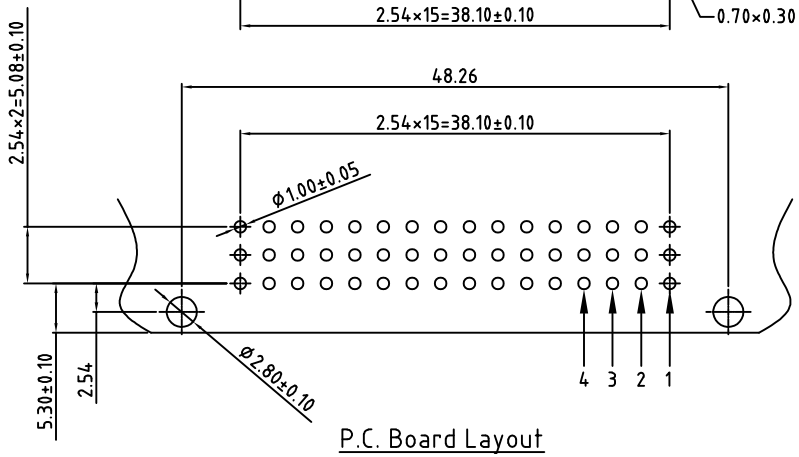

P.C. Board Layout



	abc	48	2.54mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.

TITLE	DIN 41612, Type R, Female					
PART NO.	DINR-H48S6			DWG NO.	DINR-H48S6.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	1200	Tolerance
Yumi 2009.04.27	Yumi 2009.04.27	Yumi 2009.04.27	Yumi 2009.04.27		UNIT: mm	X. ±0.5
					SCALE: NONE	X.X ±0.25
				SHEET: 01/01	REV.: A	X.XX ±0.15