
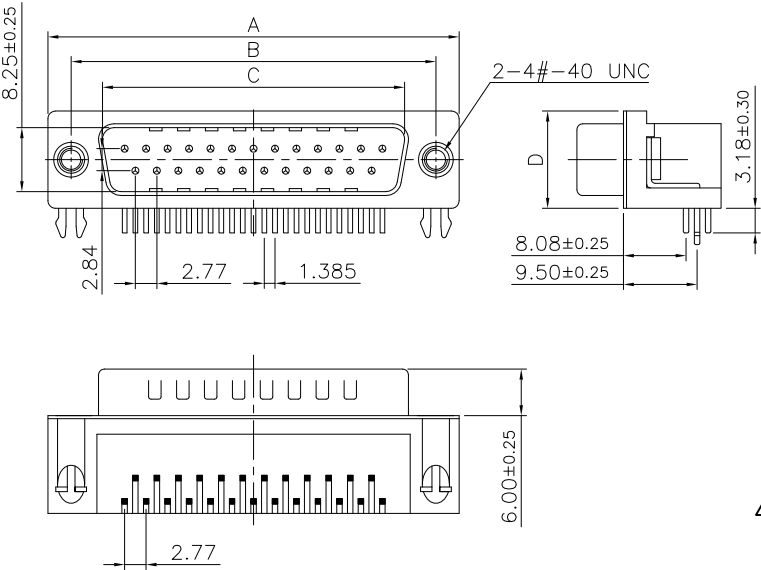


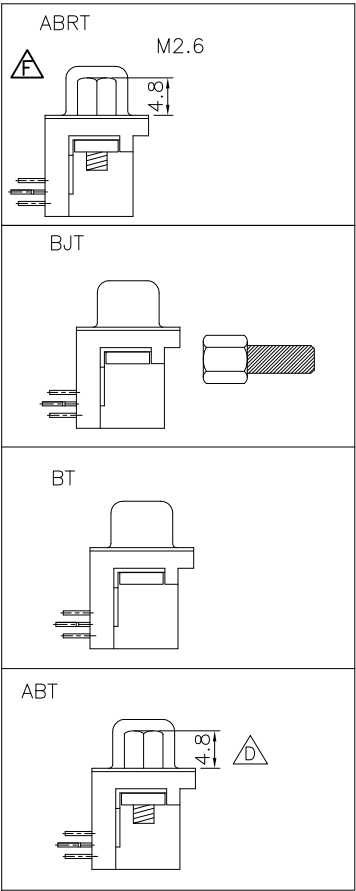

Pos	A±0.35	B±0.25	C±0.25	D±0.25
9	30.81	24.99	16.92	12.55
15	39.14	33.32	25.25	
25	53.04	47.04	38.96	
37	69.40	63.50	55.42	

Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:30m ohm. max.

Insulation Resistance:1,000M ohm. min.at 500V DC

Withstanding Voltage:500V AC/Minute

Operating Temperature Range:-55°C ~ +105°C

Material and Finish

Insulator:PBT(UL 94V-0)

Contact:Brass

Plating:Gold Plated

Shell:SPCC,Nickel Plated

Board Lock: Brass, Tin Plated

How To Order

DMR-XXPX-XXX



A: Hex Screw assembled

B: Board Lock

J: Hex Screw loose



R: Riveted hex screw

T: Threaded Insert

1:Full Gold Plated

6:Selective Gold Plated

No. Of Positions

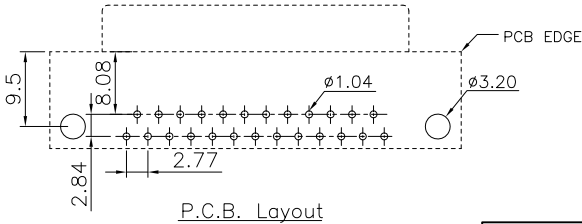

RoHS Compliant

F	23-FEB-2023		Jamie	DRAWN:	GENERAL TOLERANCE:	 ON-SHORE TECHNOLOGY, INC.	
E	24-NOV-2022	Modify P/N	Lucy	Jamie Wang	.X=±0.20 .XX=±0.15		
D	21-SEP-2022		Lucy	CHECKED:	UNIT: mm	DESCRIPTION: D-SUB Male 8.08mm Footprint Right Angle Type	
C	02-JUN-2021	Modify±0.25	MEI	Jerry Chen	SCALE: 1:1		
B	30-DEC-2020	??Z????	MEI	APPROVAL:	SHEET: 1 / 1	PART NO: DMR-XXP	
A	27-SEP-2017		Jamie Wang	Mike Wu	PROJECTION:		
REV	DATE	FILE	BY				