

Specifications:

Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:30m ohm. max.
 Insulation Resistance:1,000M ohm. min.at 500V DC
 Withstanding Voltage:500V AC/Minute
 Operating Temperature Range:-55°C ~ +105°C

Material and Finish

Insulator:PBT(UL 94V-0)
 Contact:Brass
 Plating:Gold Plated
 Shell:SPCC,Nickel Plated
 Board Lock: Brass, Tin Plated


How To Order

DMR-XXSX-XXX \triangle \triangle \triangle

A: Hex Screw assembled
 B: Board Lock
 J: Hex Screw loose
 R: Riveted hex screw \triangle
 T: Threaded Insert

1:Full Gold Plated
 6:Selective Gold Plated
 No. Of Positions

Pos	A±0.35	B±0.25	C±0.25	D±0.25
09	30.81	24.99	16.33	12.5
15	39.14	33.32	24.75	
25	53.04	47.04	38.38	
37	69.40	63.50	54.80	

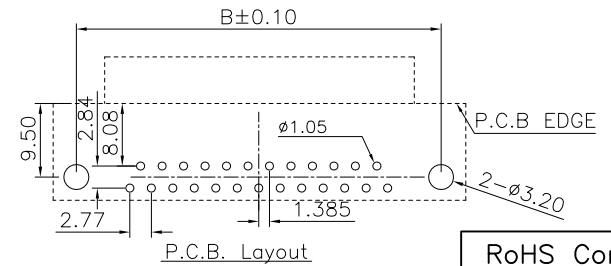

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	<p>ON-SHORE TECHNOLOGY, INC.</p>	DESCRIPTION: D-SUB Female 8.08mm Footprint Right Angle Type	SIZE
E	12-AUG-2021	Modify±0.25 \triangle	MEI	Jamie Wang	.X=±0.35 .XX=±0.25			
D	07-JUL-2021	\triangle	MEI	CHECKED:	UNIT: mm			
C	02-JUN-2021	\triangle	Lisy Liu	Jerry Chen	SCALE:			
B	12-JUN-2020	Add "H6"(Hex Screw height: 6.0mm) TYPE	Jamie Wang	APPROVAL:	SHEET: 1 / 1			
A	27-SEP-2017		Jamie Wang	Mike Wu	PROJECTION:	PART NO:	\triangle DMR-XXS	
REV	DATE	FILE	BY					