


Specifications:  
 Current Rating:1.0A AC,DC  
 Voltage Rating:500V AC,DC  
 Contact Resistance:30m ohm max.  
 Insulation Resistance: 1,000M ohm min.  
 Withstanding Voltage:500V AC/Minute  
 Operating Temperature Range:-55°C ~ +105°C

Materials:  
 Insulator:Thermoplastic(UL 94V-0)  
 Insulator Color:Black  
 Terminal:Copper Alloy  
 Contact Plating:Gold Flashed  
 Back Shell:Cold Rolled Steel,Tin Plated  
 Front Shell:Cold Rolled Steel,Nickel Plated

How To Order  
 DMSH-XXPX-X-XX

- Blank:Black
- WH:White
- BU:Blue
- Blank:Standard type
- C:Rear Rivet
- T:Front Rivet
- BRT:Board Lock-nut Rivet
- ABT:Hex Screw+Hex Nut
- 1:Full Gold Plated
- 6:Selective Gold Plated
- 7>Contact 15u" Gold Plated
- 8>Contact 30u" Gold Plated
- No. of Contacts

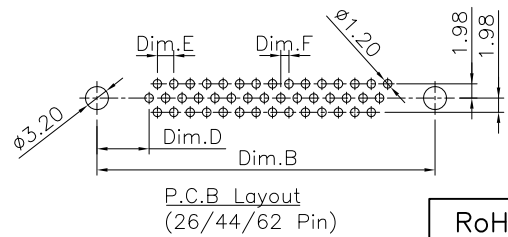

Pos	Dim.A±0.25	Dim.B±0.25	Dim.C±0.25	Dim.D±0.10	Dim.E±0.10	Dim.F±0.10
15	30.80	25.00	16.92	7.05	2.29	1.145
26	39.20	33.32	25.25	6.78	2.29	1.145
44	53.05	47.04	38.96	6.92	2.29	1.145
62	69.40	63.50	55.42	7.05	2.41	1.205

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	
E				SELIN	.X=±0.20 .XX=±0.15	
D				CHECKED:	UNIT: MM	DESCRIPTION: D-SUB Male High Density Straight Dip Stamp Pin Type
C				JERRY	SCALE: 1:1	
B	06-JUN-2023	add pcking list	JAMIE	APPROVAL:	SHEET: 1/2	PART NO: DMSH-XXPX-X-XX
A	21-SEP-2016		SELIN	RORY	PROJECTION:	
REV	DATE	FILE	BY			SIZE