
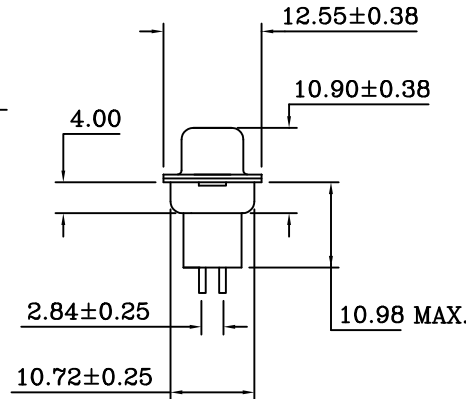


No. of Contacts	A ±0.25	B ±0.13	C ±0.38	D ±0.25	E
09	16.33	24.99	30.81	19.28	11.08
15	24.66	33.32	39.14	27.51	19.39
25	38.38	47.04	53.04	41.28	33.24
37	54.84	63.50	69.32	57.71	49.86

MATERIAL
 Insulator: PBT, 30% Glass filled, UL94V-0
 Contacts: Brass
 Shell: Steel
CONTACT PLATING:
 Underplate: 50u" ~ 100u" Ni
 Contact area: 1u" ~ 30u" Selective Gold
 Solder tails area: 100u" ~ 200u" Sn
ELECTRICAL
 Voltage Rating: 250V
 Current Rating: 3 A
 Contact Resistance: <15mΩ
 Insulation Resistance: >3000 MΩ
 Dielectric Withstanding Voltage: 1000 VAC/minute
 Operating Temperature: -55°C ~ +105°C

RoHS Compliant

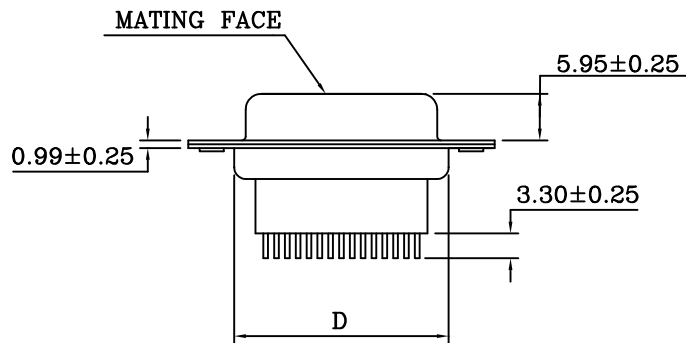


Part Number

DMSHP-XXSX

No. of Contacts ↑


PLATING
 6 = Selective Gold flash/Nickel (STD)
 7 = Selective 15u" Gold/Nickel
 8 = Selective 30u" Gold/Nickel
 NON-STD may require MOQ

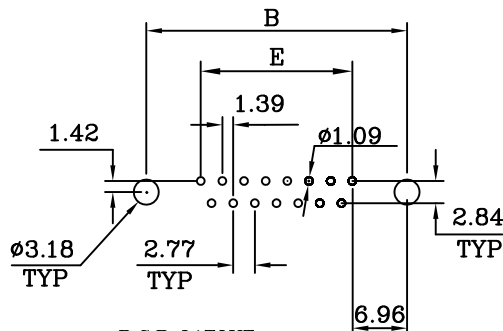

P.C.B LAYOUT
 TOLERANCES: ±0.05mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		DMSHP Series - PCB Straight hi profile D-Sub, Socket			
PART NO.	DMSHP-XXSX	DWG NO.	DMSHP-XXSX.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	7100 Tolerance	
Billy 2006.05.26	Johnn 2006.05.26	Tony 2006.05.26	Steven 2006.05.26		
				UNIT: mm	.X ±0.30
				SCALE: NONE	.XX ±0.20
SHEET: 01/01				REV.: A	