
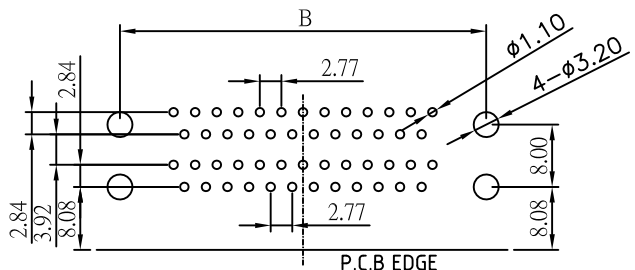


example above shows -BT option

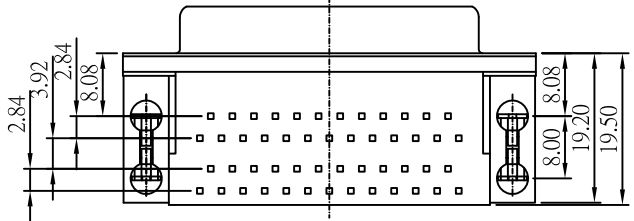

RECOMMENDED P.C.B LAYOUT

Dimensions

Positions	A	B	C	E	F
09	16.92	24.99	30.81	15.88 (A)	28.40
15	25.25	33.32	39.14	19.05 (B)	31.60
25	38.96	47.04	53.04	22.86 (C)	35.40
37	55.42	63.54	69.32		

RoHS Compliant

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:
 Contact Current Rating: 5 A
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance: >5000 M ohms
 Contact Resistance: 25 <m ohms
 Operating Temperature: -55°C to +105°C

MECHANICAL CHARACTERISTICS:
 Contact Insertion Force: <341 g
 Contact Separation Force: >21 g

MATERIALS:
 Terminal: Copper Alloy
 Insulator: PBT UL 94V-0 Rated
 Shell: Cold Roller Steel

FINISHES:
 Contact: Gold Flash
 Shell: Nickel Plated

Mounting options

- A-4-40 Jack screws assembled
- B-Board Locks
- D-Board locks rear holes
- G-Grounding Straps
- J-4-40 Jack Screws (bulk packed)
- R-Riveted 4-40 Jack screws
- T-Threaded Inserts

Part Number

DP-XXSXXSXX-(see options)

of circuits

09, 15, 25, 37

DIMENSION E (X)
 15.88 (A)
 19.05 (B)
 22.86 (C)

PLATING

- 1= Full Gold Flash/Nickel (STD)
 - 6= Selective Gold flash/Nickel
 - 7 = Selective 15u" Gold/Nickel
 - 8 = Selective 30u" Gold/Nickel
- NON-STD may require MOQ

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE						DP Series - Dual Port D-sub, Female over Female	
PART NO.		DP-XXSXXSXX-XXX		DWG NO.		DP-XXSXXSXX-XXX.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	8000		Tolerance	
Kent 2006.10.30	Kent 2006.10.30	Paul 2006.10.30	James 2006.10.30			UNIT: mm	X.X ±0.25
				SHEET: 01/01		SCALE: NONE	X.XX ±0.20
						REV.: A	