


EDSTLZ960/X-OE



2-16 poles, Spacing 7.62 mm
insert required no. of poles \times
How to order see page 5

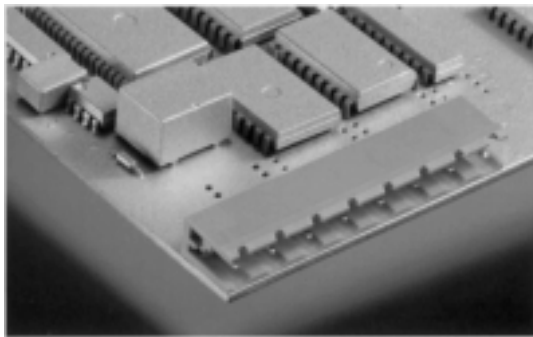

Ratings:

Rated Voltage	300 V	400 V
Rated Current	15 A	12 A (T60)
Rating Impulse Voltage/Dirt Level		6 kV/3

Dimensions

Spacing	7.62 mm
PCB Hole Diameter	1.4 mm

Materials

Insulating Material	PA/PBTP
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu

Color

Green

