

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.



Ratings

Use Group	B	D
Rated Voltage	300V	300V
Rated Current	15A	10A

Insulating Material

Material	PA 6.6
Flammability Class	UL 94 V-0

Materials


Contact Pin	Copper Alloy
Temperature Range	-40° C ~ 105° C

RoHS Compliant

Part No.: **EDSTLZ965/X**

No. of Poles
 02 2 Poles
 03 3 Poles

 16 16 Poles

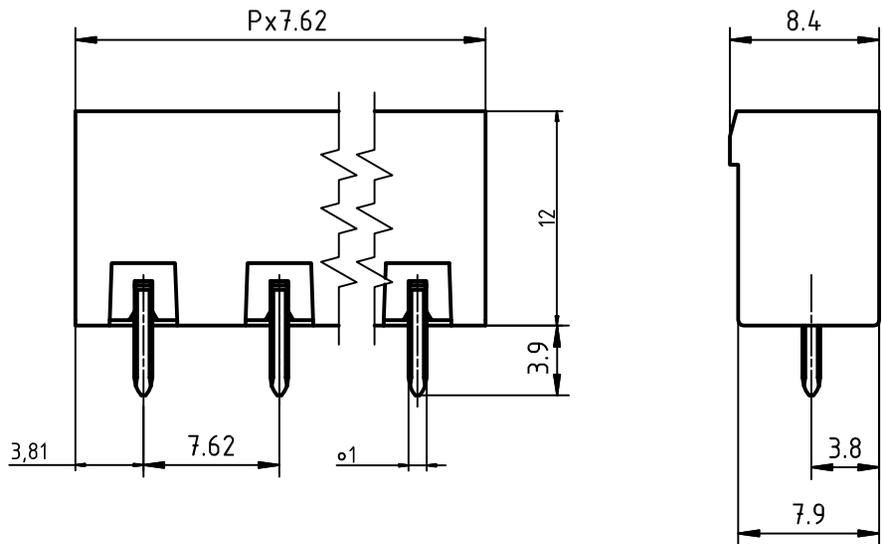

DWG	WF. Zhang	DATE	2017.09.11	UNITS:	MM	SHEET:	1 OF 1	Tolerance
CHK.	WF. Zhang	DATE	2017.09.11	SCALE:	NONE 5:1 (:)	REV:	A	X. ±0.50
APP.		DATE		TITLE:	EDSTLZ965 series 7.62 mm vertical closed header			X.X ±0.30
				PART NO.	EDSTLZ965/X			X° ±1°
				DWG NO.	EDSTLZ965/X.DWG			Ⓢ Ⓜ

△				
SIGN	DESCRIPTION	CHK.	DATE	



ON-SHORE TECHNOLOGY, INC.