

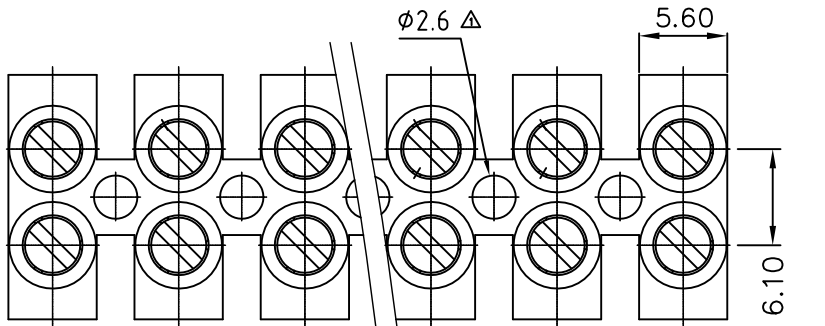




SIGN	DATE	DESCRIPTION	APPROVER
Δ	07.26.2012	Added mounting hole diameter	
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

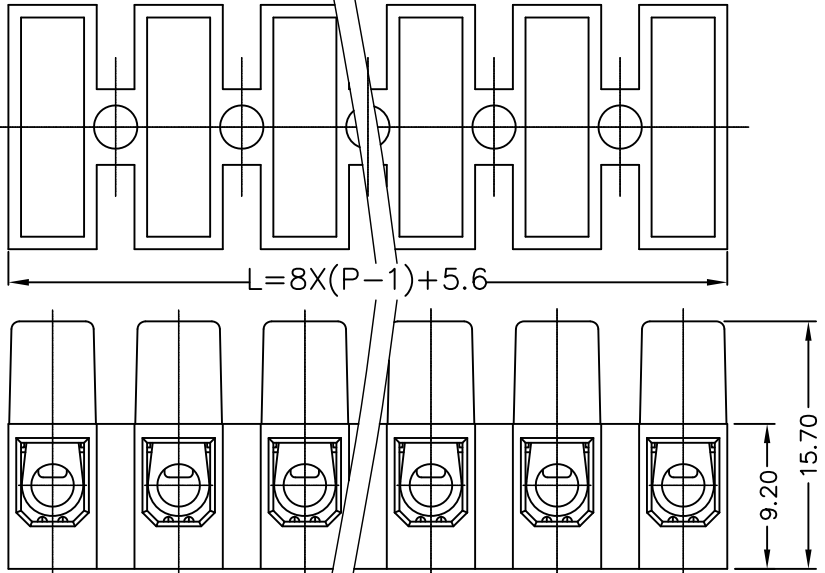

- NOTES:
- Rating: 300V 15A(UL);
 - Insulation Withstanding Voltage: AC2000V/MIN
 - Insulation Resistance: $\geq 500M\Omega$ or more at DC500
 - Temperature Range: $-33^{\circ}C/+105^{\circ}C$
 - Screw Torque Value: 3.5 lbf-in(UL)
 - Wire Range: 12-24AWG
 - Housing: Nylon PA66, UL-94V0
 - Screw M2.5, Steel, Zinc Plated
 - Standard Color: Natural


Agency Approvals:  

RoHS Compliant

DIM	P	2	3	4	5	6	7	8	9	10	11	12
L		13.6	21.6	29.6	37.6	45.6	53.6	61.6	69.6	77.6	85.6	93.6
TOL (±)		0.08	0.12	0.16	0.20	0.24	0.28	0.32	0.36	0.40	0.44	0.48

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		ES0800 Series - 8.0mm Euro Strip, flat base					
PART NO.	ES0800/XXFB (XX - number of poles per row)	DWG NO.	ES0800/XXFB.DWG				
APPROVED	CHECKED	DESIGNED	DRAWN	5020		Tolerance	
KSZ 2007.08.01	KSZ 2007.08.01	KSZ 2007.08.01	KSZ 2007.08.01	 UNIT: mm SCALE: NONE		.X ±0.15	
SHEET: 01/01						REV.: B	