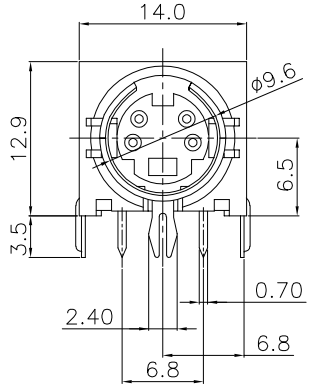

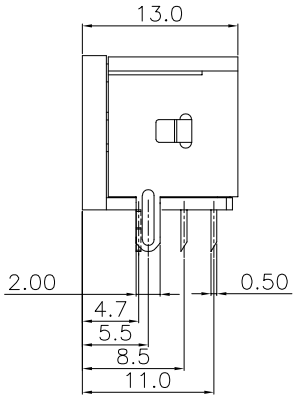

Specifications:
Rated Voltage And Current: DC 12V.2A Max;
AC 100V.1A Max
Contact Resistance: 30m ohm.Max
Insulation Resistance: 100M ohm.Min
Withstanding Voltage: 250V AC/Minute

Material:
Insulator: Thermoplastic (UL94V–0)
Insulator Color: Black
Contact: Copper Alloy
Plating: Selective Gold Plated
Ground: Copper Alloy, Tin Plated.
Shell: SPCC, Nickel Plated.

How To Order
MD–4046
└ No. Of Contacts





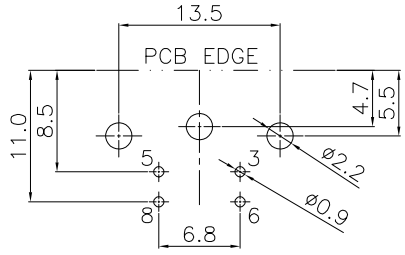

P.C.B Layout
(BOTTOM VIEW)

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C			
B			
A	29–MAR–2010		JAMIE

DRAWN: JAMIE
CHECKED: JERRY
APPROVAL: RORY

GENERAL TOLERANCE:
.X=±0.25
.XX=±0.13

UNIT: MM
SCALE: 1:1
SHEET: 1/1
PROJECTION:

ON–SHORE TECHNOLOGY, INC.

DESCRIPTION: MINI DIN JACK FLAT 4 PIN DIP 4 wall Shield

PART NO: MD–4046

SIZE A4