
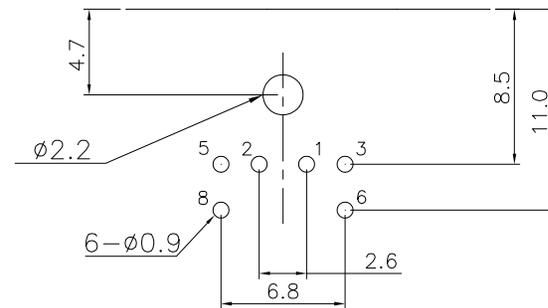
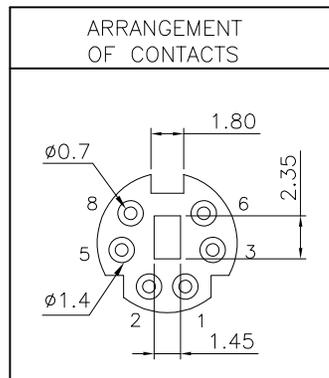


Specifications:
 Current Rating: 1.0A AC/2.0A DC
 Voltage Rating: 100V AC/12V DC
 Contact Resistance: 30m ohm.Max
 Insulation Resistance: 100M ohm.Min
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40°C to + 105°C

Material:
 Insulator: PBT(UL94V-0)
 Insulator Color: Black
 Contact: Phosphor Bronze
 Plated: Selective Gold Plated
 Ground: Brass, Tin Plated

How To Order
 MD-6006
 └─ No. of Contacts



P.C.B Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	OST	ON-SHORE TECHNOLOGY, INC.
E				Romina Wu	.X=±0.25 .XX=±0.13		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				Jerry Chen	SCALE: 1:1	Mini Din Jack Flat 6P Dip No Shield	A4
B				APPROVAL:	SHEET: 1/1	PART NO:	
A	29-MAR-2010		Romina Wu	Rory Chen	PROJECTION:	MD-6006	
REV	DATE	FILE	BY				