


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

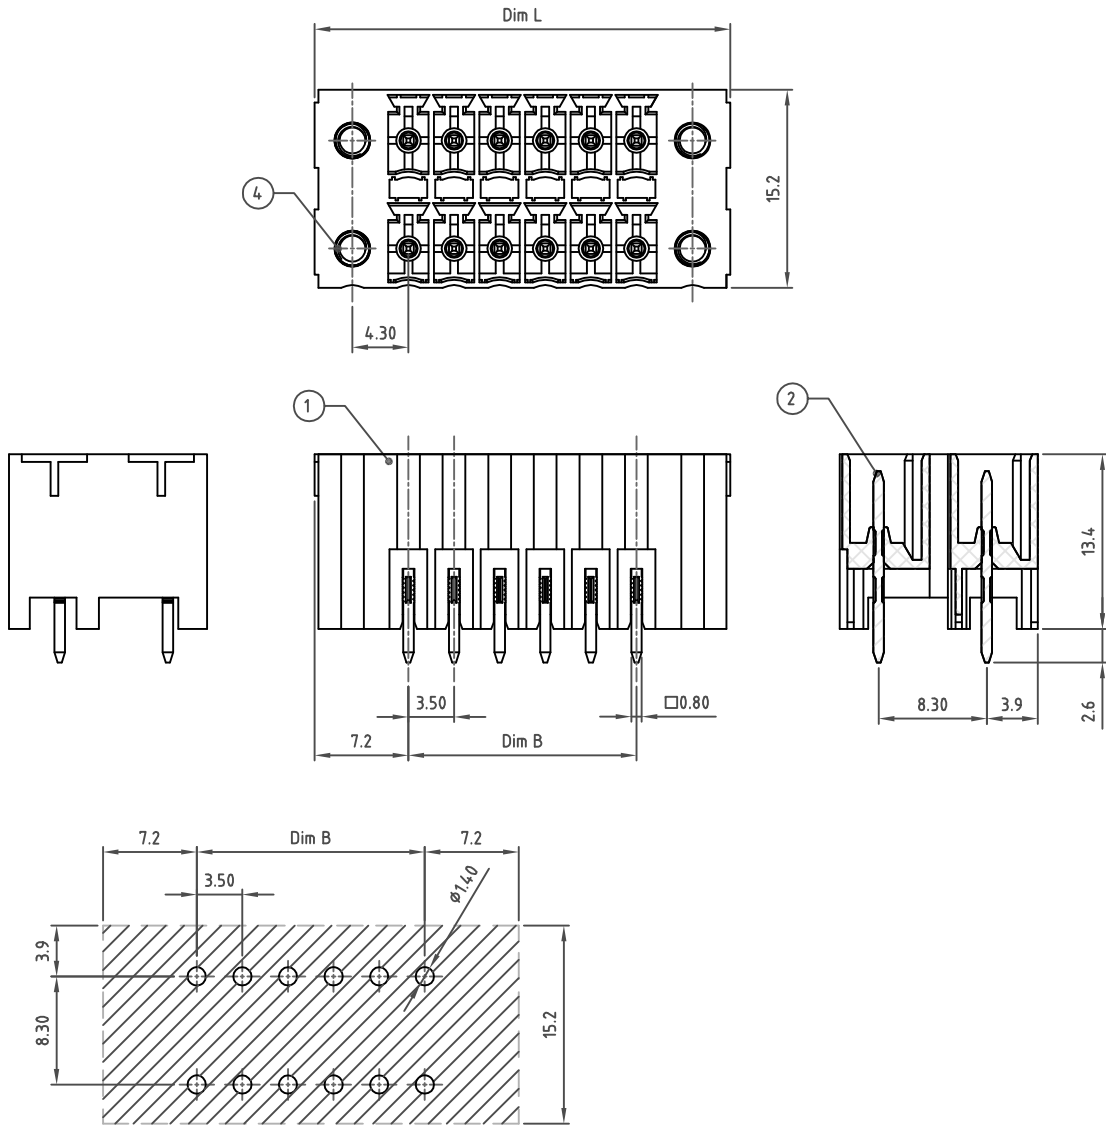

Technical data

1. Nominal voltage: 150V/8A
PITCH: 3.5mm
2. Insulation Withstanding Voltage:
AC 1300V/MIN
3. Insulation Resistance:
1000MΩ or more at DC500V
4. Flange tightening torque:
3.0kgf.cm (0.3N.m)
5. Flange screw thread: M2.5
6. Operating temperature range: -40°C ~ 115°C
7. Undimensioned Tolerances:

Dim.L=(P-1)x3.5+14.4		
Dim.B=(P-1)x3.5		
P=1/2 Number of poles (04-48p)		
0-30mm	±0.15	±0.20
over 30mm-60mm	±0.20	±0.25
over 60mm-90mm	±0.25	±0.30
over 90mm	±0.30	±0.40

8. Safety approval:
9. RoHS Compliance

Part No.: **OSTKEXX1250**

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	2: Red
...	3: Orange
24 24 Poles	4: Yellow
	5: Green (Standard)
Nonstandard colors	6: Blue
Mins could apply	8: Grey

B		Add NO MARK	WF.Z	12/19'18
REV	SIGN	DESCRIPTION	CHK.	DATE

3	Screw nut	BRASS	4	
2	PIN	COPPER	TIN PLATED	P
1	BODY	PA66 UL94V-0	ALL COLOR	1
ITEM	NAME OF PART	MATERIAL	NOTES	Q'TY
DWG	WF. Zhang	DATE	2018.12.19	UNITS: MM SHEET: 1 OF 1 Tolerance
CHK.	WF. Zhang	DATE	2018.12.19	SCALE: NONE 2.5:1 (:) REV.: B X. ±0.50
APP.		DATE		TITLE: OSTKE3.5 Series W/flange X.XX ±0.30
				type Vertical (180D) X° ±1°
				PART NO. OSTKEXX1250
				DWG NO. OSTKEXX1250.dwg



ON-SHORE TECHNOLOGY, INC.