
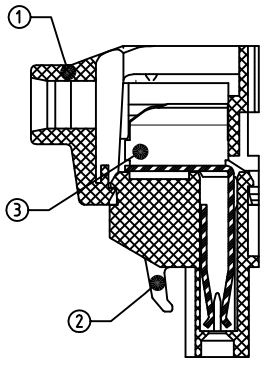



Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

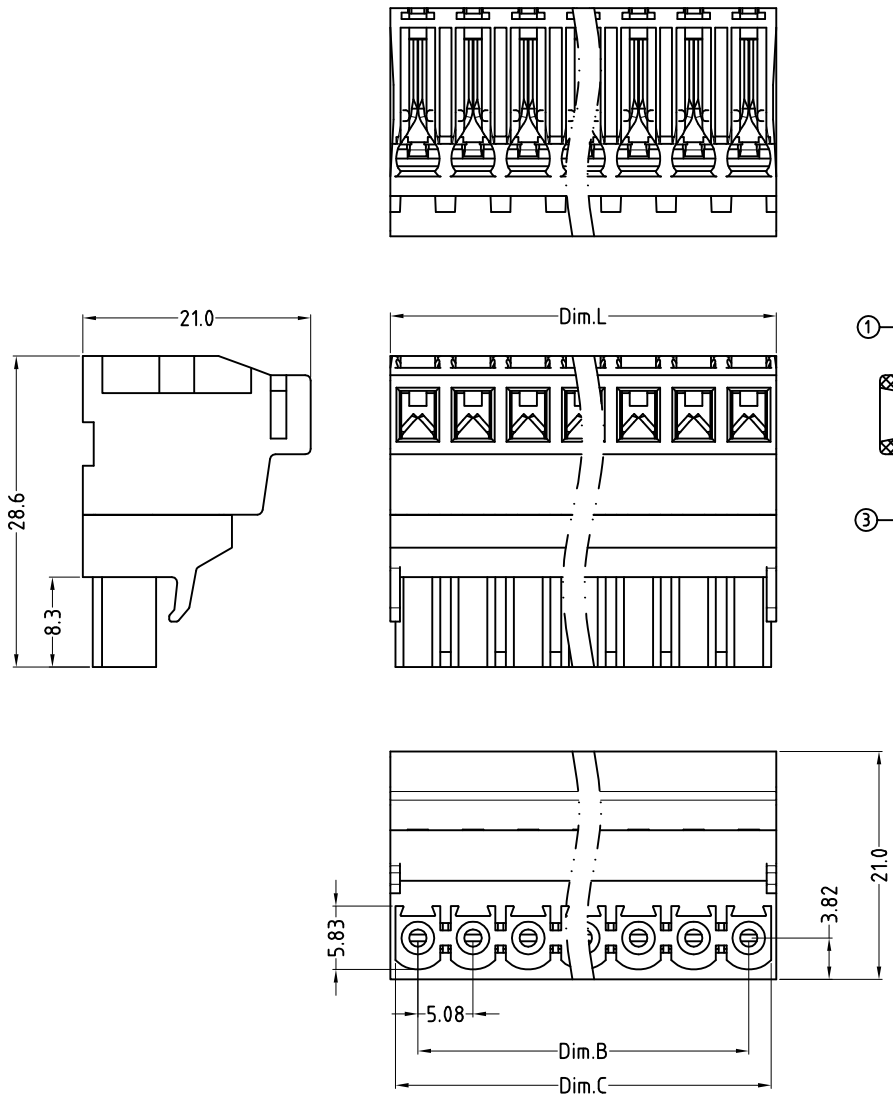

- Technical data
- Nominal voltage: 300V/7A
PITCH:5.0mm
 - Connection capacity:
AWG 24-18 Str/Sol AWM, Style 1015
 - Insulation Withstanding Voltage:
AC 1600V/MIN
 - Insulation Resistance:
1000MΩ or more at DC500V
 - Stripping length: IDC Type
 - Operating temperature range:-40°C ~ 115°C
 - Undimensioned Tolerances:

Dim.L=Px5.08		
Dim.C=Px5.08-0.98		
Dim.B=(P-1)x5.08		
P= number of poles(2-24p)		
0-30mm	Dim B&C ± 0.15	Dim L ± 0.20
over 30mm-60mm	± 0.20	± 0.25
over 60mm-90mm	± 0.25	± 0.30
over 90mm	± 0.30	± 0.40

8.Safety approval: (VDE) pending
9.RoHS Compliance

Part No.: **OSTNTXX5080**

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	2: Red
...	3: Orange
24 24 Poles	4: Yellow
	5: Green
	6: Blue
	8: Grey (Standard)

Nonstandard colors
Mins could apply

3	CONTACT	BRONZE (PhBz)	TIN PLATED	P
2	COVER	PA66 UL94V-0	GREEN	1
1	BODY	PA66 UL94V-0	GREEN	1
ITEM	NAME OF PART	MATERIAL	NOTES	Q'TY
DWG	Kobe. Kang	DATE 2016.05.05	UNITS: MM	SHEET: 1 OF 1
CHK.	WF. Zhang	DATE 2016.08.31	SCALE: NONE 1:1	REV: A
APP.		DATE	TITLE: OSTNT 5.08 Series IDC type	X. ±0.50
			PART NO. OSTNTXX5080	X.X ±0.30
			DWG NO. OSTNTXX5080.dwg	X.XX ±0.10
				X* ±1°

△			
△			
SIGN	DESCRIPTION	CHK.	DATE



ON-SHORE TECHNOLOGY, INC.