
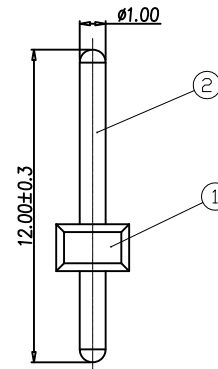
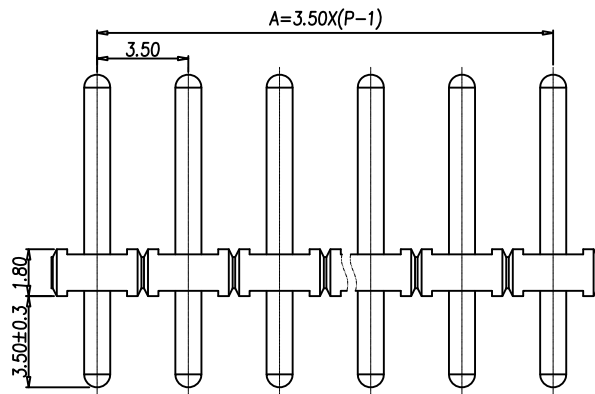


PCB LAYOUT
S=2.5:1

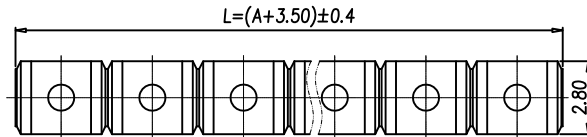

SPECIFICATIONS

Rating:300V/10A

Insulation Withstanding Voltage:AC1600V/MIN

Insulation Resistance:500MΩ or more at DC500V;

Contact Resistance: ≤5mΩ

Temperature Range:-40℃~+115℃

Mating with Pin:φ1.0mm

RoHS compliant

Approval: 

Part No.:

OSTOPXX2200

No. of Poles
02 2 Poles
03 3 Poles
...
24 24 Poles

2	PIN	COPPER ALLOY	TIN PLATED	P
1	BODY	PA66 UL94V-0	BLACK	1
ITEM	NAME OF PART	MATERIAL	NOTES	Q'TY
DWG.	WF. Zhang	DATE 2017.11.22	UNITS: MM	SHEET: 1 OF 1
CHK.	WF. Zhang	DATE 2017.11.22	SCALE: NONE 2:1 (:)	REV.: A
APP.		DATE	TITLE: OSTOP 3.5mm Series	X. ±0.50
			PART NO. OSTOPxx2200	X.X ±0.30
			DWG NO. OSTOPXX2200.dwg	X° ±1°

△			
SIGN	DESCRIPTION	CHK.	DATE



ON-SHORE TECHNOLOGY, INC.