

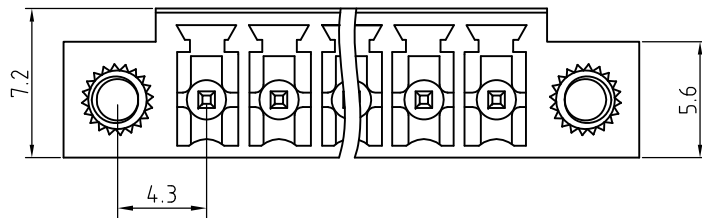
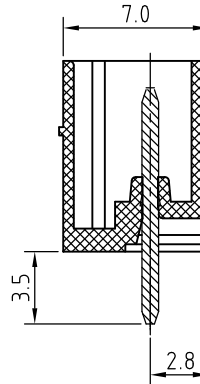


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

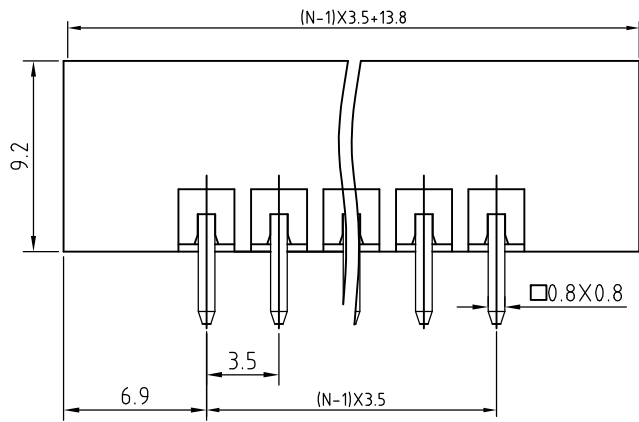

N=Number of contacts

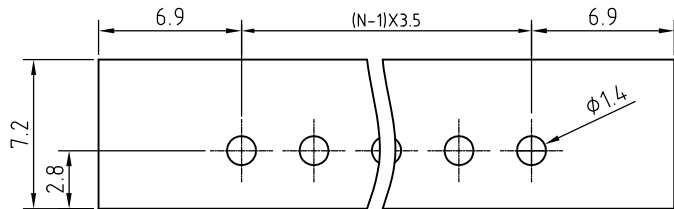

P.C.B. LAYOUT

Technical Data:
Electrical
 Pitch: 3.5mm
 Voltage rating: 300V
 Current rating: 12 Amps
 Withstanding Voltage: 2500VAC(1min)
Mechanical:
 Operating temperature: -40°C to +105°C
 Soldering temperature:
 Temperature= 250°C±10°C /5 seconds max
 Safety approval:
 RoHS Compliance

Part No.:

OSTOQXX1550

No. of Poles
 02 2 Poles
 03 3 Poles

 24 24 Poles

COLOR
 0: Black
 2: Red
 3: Orange
 4: Yellow
 5: Green (Standard)
 6: Blue
 8: Grey

Nonstandard colors
 Mins could apply

3	Flange nut	Copper Alloy						2
2	Pin	Copper Alloy				Tin plated		1xN
1	Body	PA66-30%GF UL94V						1
ITEM	NAME OF PART	MATERIAL	NOTES				Q"TY	
DWG.	DATE		UNITS:	MM	SHEET:	1 OF 1	Tolerance	
CHK.	DATE		SCALE:	NONE 4:1 (:)	REV.:	A	X.	±0.50
APP.	DATE		TITLE:	OSTOQ SERIES 3.5MM			X.X	±0.30
				WITH FLANGE VERTICAL			X.XX	±0.10
			PART NO.:	OSTOQXX1550			X°	±1°
			DWG NO.:	OSTOQXX1550.DWG				

REV	△				
REV	SIGN	DESCRIPTION	CHK.	DATE	



ON-SHORE TECHNOLOGY, INC.

