

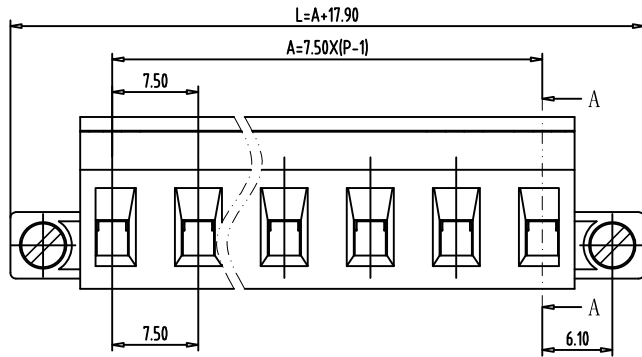



Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

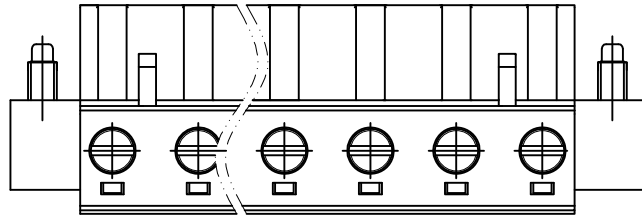

02P

Technical data

- 1.Nominal voltage: 300V/15A
PITCH:7.5 mm
- 2.Connection capacity:
AWG 30-12
- 3.Insulation Withstanding Voltage:
AC 1600V/MIN / 2500V/MIN
- 4.Insulation Resistance:
1000MΩ or more at DC500V
- 5.Tightening torque:
5.0kgf.cm (0.5N.m)
- 6.Screw thread: M3
- 7.Stripping length: 7-8mm
- 8.Operating temperature range:-40°C ~ 115°C
- 9.Safety approval:
- 10.RoHS Compliance



Part No.: **OSTTJXXA152**

No. of Poles
02 2 Poles
03 3 Poles
...
16 16 Poles

COLOR
0: Black
2: Red
3: Orange
4: Yellow
5: Green (Standard)
6: Blue
8: Grey

Nonstandard colors
Mins could apply

6	FLANGE SCREW	STEEL	M2.5, Zn PLATED	
5	CAGE	BRASS	M3.0x0.5, Ni PLATED	P
4	SCREW	STEEL	M3.0x0.5, Zn Plated	P
3	WIRE GUARD	BRONZE (PhBz)	TIN PLATED	P
2	COVER	PA66 UL94V-0	ALL COLOR	1
1	BODY	PA66 UL94V-0	ALL COLOR	1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
DWG	W.F Zhang	DATE 2018.05.16	UNITS: MM SHEET: 1 OF 1	Tolerance
CHK	W.F Zhang	DATE 2018.05.16	SCALE: NONE 2.5:1 (:) REV: A	X. ±0.50
APP.		DATE	TITLE: OSTTJ Series 7.5 mm with flange	X.X ±0.30
			PART NO. OSTTJXXA152	X.XX ±0.10
			DWG NO. OSTTJXXA152.dwg	X° ±1°

△	DESCRIPTION	CHK.	DATE
SIGN			



ON-SHORE TECHNOLOGY, INC.