

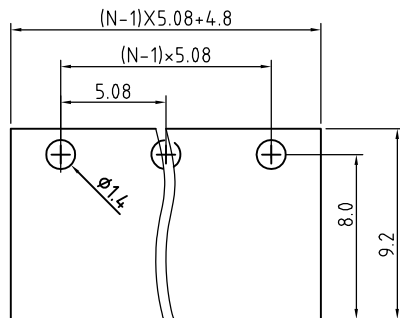



Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

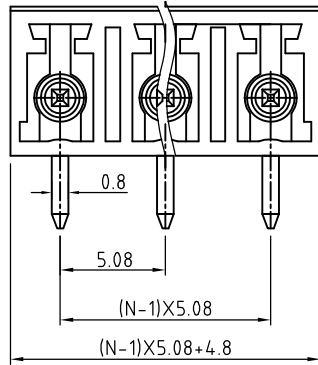

Technical Data:  
Electrical  
Pitch: 5.08mm  
Voltage rating: 300V  
Current rating: 12 Amps  
Withstanding Voltage: 2500VAC(1min)  
Mechanical:  
Operating temperature: -40°C to +105°C  
Soldering temperature  
Temperature= 250°C±10°C /5 seconds max  
Safety approval:   
RoHS Compliance

Part No.:

**OSTVSXX5151**

No. of Poles  
02 2 Poles  
03 3 Poles  
... ..  
24 24 Poles

COLOR  
0: Black  
2: Red  
3: Orange  
4: Yellow  
5: Green (Standard)  
6: Blue  
8: Grey

Nonstandard colors  
Mins could apply

2	Pin	Copper Alloy	Tin plated	1xN
1	Body	PA66-30%GF UL94V		1
ITEM	NAME OF PART	MATERIAL	NOTES	Q'TY
DWG.	DATE	UNITS:	MM	SHEET: 1 OF 1
CHK.	DATE	SCALE:	NONE 4:1 ( : )	REV.: A
APP.	DATE	TITLE:	OSTVS SERIES 5.08MM CLOSED RIGHT ANGLE	X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
		PART NO.	OSTVSXX5151	
		DWG NO.	OSTVSXX5151.DWG	

REV	SIGN	DESCRIPTION	CHK.	DATE



ON-SHORE TECHNOLOGY, INC.