


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

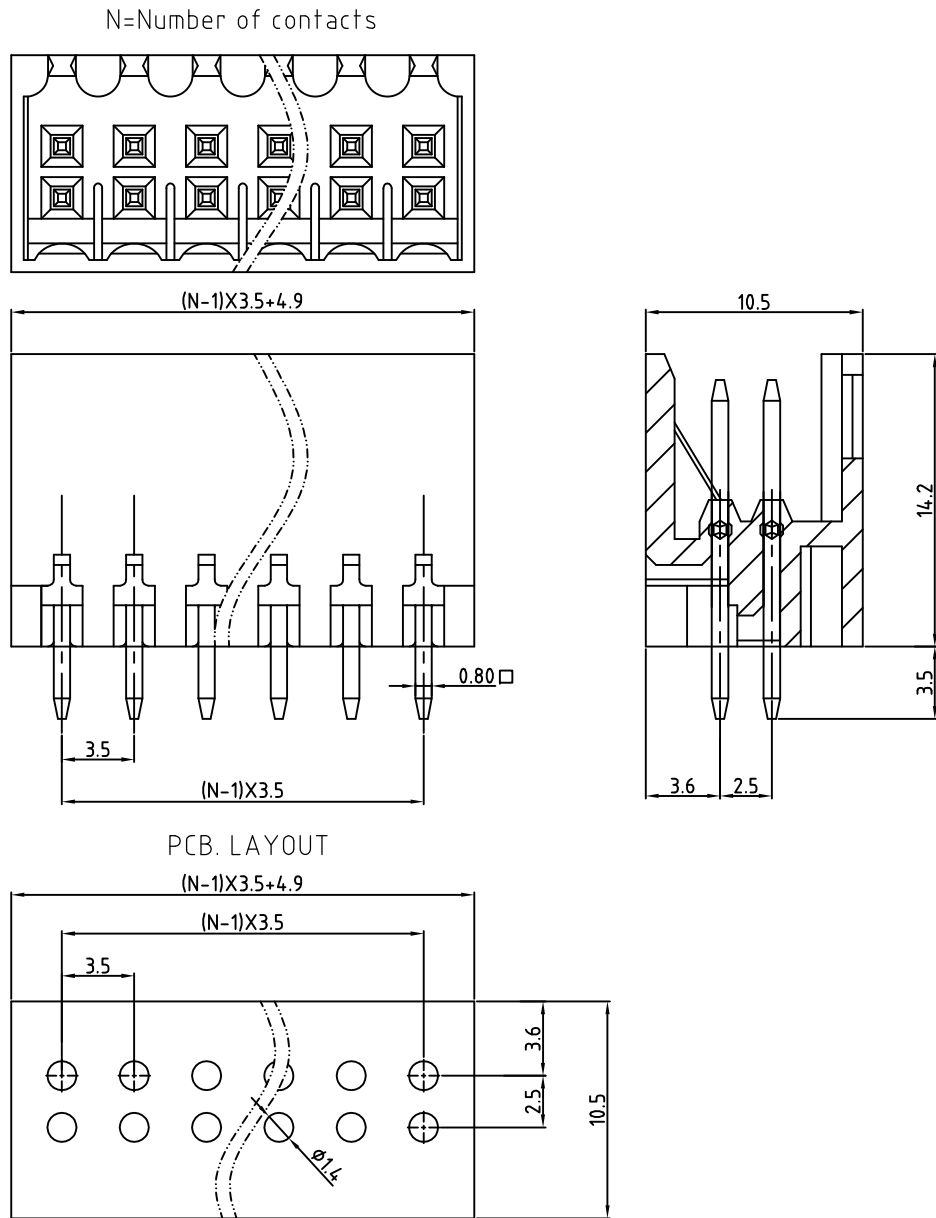

**Technical Data:**

**Electrical**

- Pitch: 3.5mm
- Voltage rating: 300V
- Current rating: 12 Amps
- Withstanding Voltage: 2500VAC(1min)

**Mechanical:**

- Operating temperature: -40°C to +105°C
- Soldering temperature  
Temperature= 250°C±10°C / 5 seconds max
- Safety approval:
- RoHS Compliance

Part No.:

**OSTVXXX1130**

<p>No. of Poles</p> <p>02 2 Poles</p> <p>03 3 Poles</p> <p>... ..</p> <p>24 24 Poles</p>	<p>COLOR</p> <p>0: Black (Standard)</p> <p>2: Red</p> <p>3: Orange (Standard)</p> <p>4: Yellow</p> <p>5: Green</p> <p>6: Blue</p> <p>8: Grey</p>
--	--

Nonstandard colors  
Mins could apply

2	Pin	Copper Alloy	Tin plated	2xN
1	Body	PA66-30%GF UL94V		1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
DWG:	DATE	UNITS: MM	SHEET: 1 OF 1	Tolerance
CHK:	DATE	SCALE: NONE 4:1 ( : )	REV.: A	X. ±0.50
APP:	DATE	TITLE: OSTVX SERIES 3.5MM		X.XX ±0.30
		CLOSED VERTICAL		X.XX ±0.10
		PART NO. OSTVXXX1130		X* ±1°
		DWG NO. OSTVXXX1130.DWG		

REV	△	DESCRIPTION	CHK.	DATE
-----	---	-------------	------	------



ON-SHORE TECHNOLOGY, INC.