

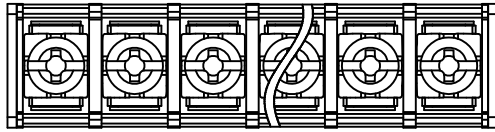



Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.



N=Number of contacts

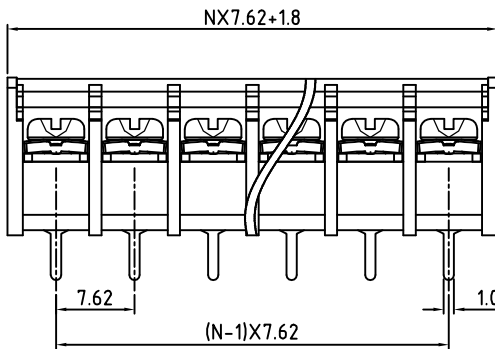

P.C.B LAYOUT

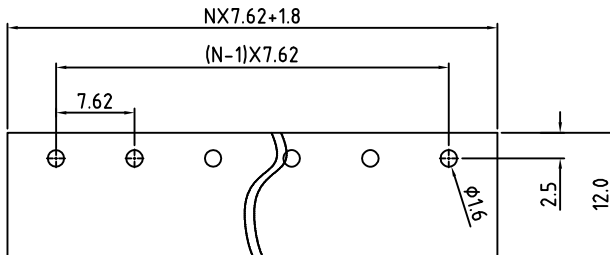

Technical Data:

Electrical

Pitch: 7.62mm
 Voltage rating: 300 V
 Current rating: 10 Amps
 Contact resistance: 20mΩ(max)
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
 Wire range: 14-22 AWG

Mechanical:

Torque: 8.0kgf.cm/M3.0
 Operating temperature: -40°C to +105°C
 Soldering temperature
 Temperature= 250°C±10°C /5 seconds max
 Safety approval:
 RoHS Compliance

Part No.: **OSTYK302XX230**

No. of Poles
 02 2 Poles
 03 3 Poles

 24 24 Poles

4	Cover	PC					1
3	Screw	Steel / M3.0		Ni plated			1xN
2	Terminal	Copper Alloy		Tin plated			1xN
1	Body	PA66+30%GF/PBT+15%GF					1
ITEM	NAME OF PART	MATERIAL	NOTES			Q"TY	
DWG.	DATE	UNITS:	MM	SHEET:	1 OF 1	Tolerance	
CHK.	DATE	SCALE:	NONE 2:1 (.)	REV.:	A	X. ±0.50	
APP.	DATE	TITLE:	OSTYK-302 SERIES 7.62MM			X.X ±0.30	
			WITHOUT FLANGE & WITH COVER			X.XX ±0.10	
		PART NO.	OSTYK302XX230			X° ±1°	
		DWG NO.	OSTYK302XX230.DWG				

REV	△	SIGN	DESCRIPTION	CHK.	DATE



ON-SHORE TECHNOLOGY, INC.