

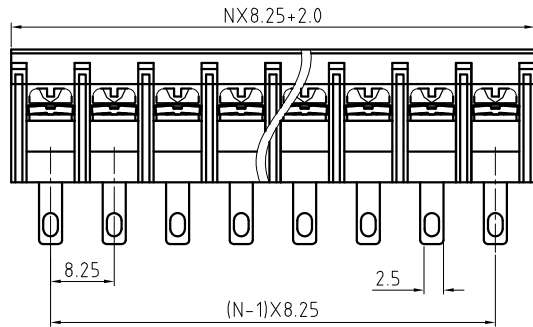
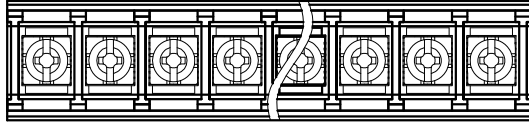


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

N=Number of contacts

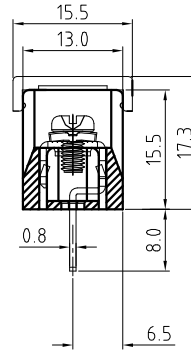

P.C.B LAYOUT

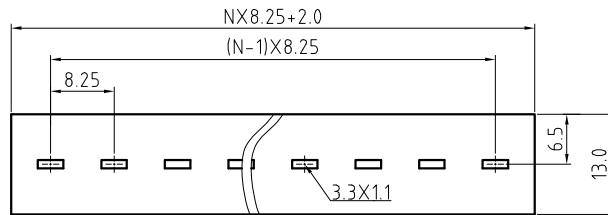

Technical Data:

Electrical

Pitch: 8.25mm

Voltage rating: 250 V

Current rating: 20 Amps

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 14-22 AWG

Mechanical:

Torque: 7.0kgf.cm/M3.0

Operating temperature: -40°C to +105°C

Soldering temperature

Temperature= 250°C±10°C /5 seconds max

Safety approval:

RoHS Compliance

Part No.: **OSTYK403XX230**

No. of Poles  
 02 2 Poles  
 03 3 Poles  
 ... ..  
 24 24 Poles

4	Cover	PC					1
3	Screw	Steel / M3.0	Ni plated				1xN
2	Terminal	Copper Alloy	Tin plated				1xN
1	Body	PA66+30%GF/PBT+15%GF					1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY			
DWG.	DATE	UNITS:	MM	SHEET:	1 OF 1	Tolerance	
CHK.	DATE	SCALE:	NONE 15:1 ( : )	REV:	A	X.X	±0.50
APP.	DATE	TITLE:	OSTYK-403 SERIES 8.25MM			X.XX	±0.30
			WITHOUT FLANGE & WITH COVER			X°	±1°
		PART NO.	OSTYK403XX230				
		DWG NO.	OSTYK403XX230.DWG				

REV	△	DESCRIPTION	CHK.	DATE



ON-SHORE TECHNOLOGY, INC.