


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

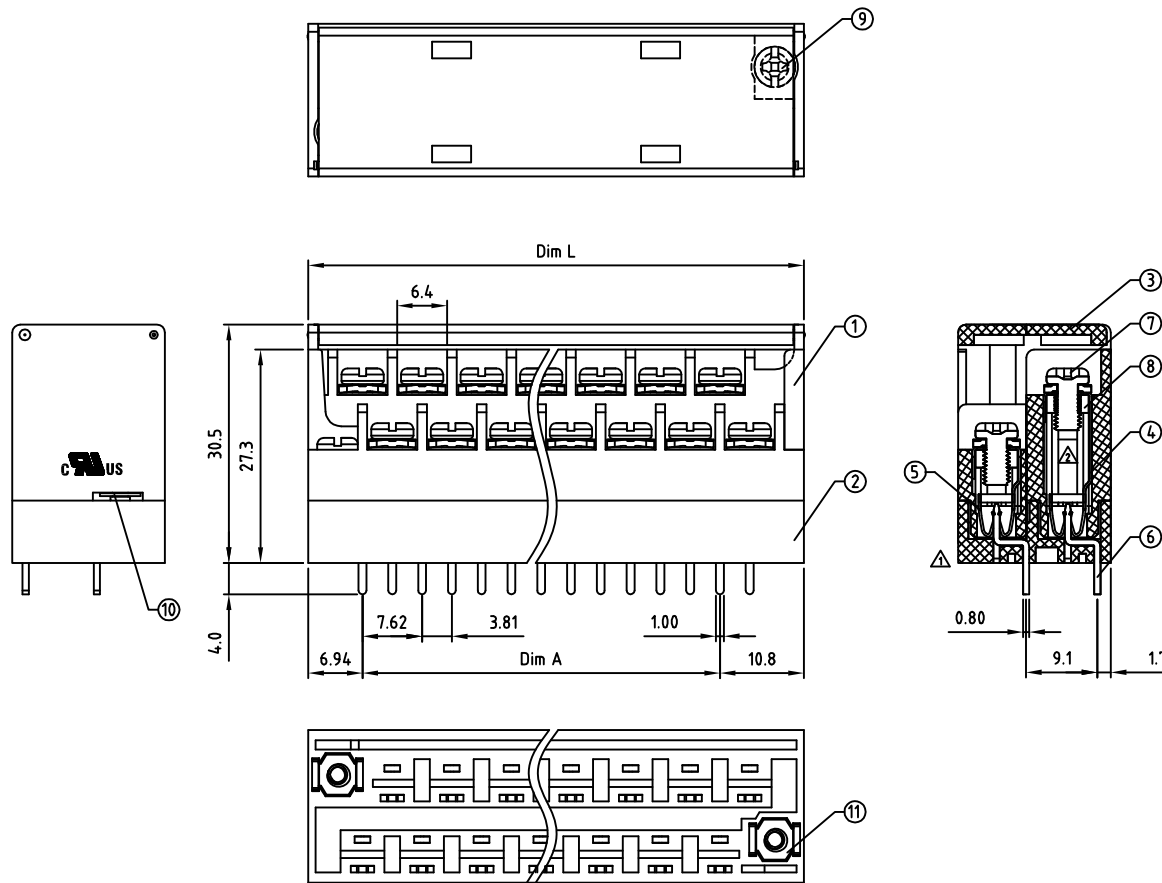

- Technical data
- Nominal voltage: 300V/15A  
PITCH:3.81mm
  - Connect capacity  
12-22AWG
  - Insulation Withstanding voltage: AC2000V/Min
  - Insulation Resistance:  
1000M or more at DC500V
  - Tightening torque: 7Lb-In(0.8N.m)
  - Screw thread:M3
  - Wire strip length:6-7mm
  - Soldering temperature: 250°C±10°C/5s
  - Operating temperature range:-40°C ~ 115°C
  - Safety Approval
  - RoHS Compliance
  - Undimensioned Tolerances:

Dim.L=(P-1)x7.62+17.69		
Dim.A=(P-1)x7.62		
P= number of poles		
	Dim P	Dim L
0-30mm	±0.15	+0.15/-0.20
over 30mm-60mm	±0.20	+0.15/-0.25
over 60mm-90mm	±0.25	+0.20/-0.30
over 90mm	±0.40	+0.20/-0.40

Part No: **OSTYK661XX130**

- No. of Poles
- 02 2 Poles
  - 03 3 Poles
  - ... ..
  - 24 24 Poles

ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
11	Nut (Socket)	C2680(H62), Sn plated M3		2
10	Circlip	SK7#		2
9	Screw flange	C1018 Ni Cr3+ plated M3		2
8	Hexagon nut	Steel Ni plated M3		P
7	Screw	C1022 Ni plated M3		P
6	contact pin (Socket)	C2680(H62) Sn or Au plated		P
5	contact pin (Plug)	C5210 Sn or Au plated contact point		1/2 P
4	contact pin (Plug)	C5210 Sn or Au plated contact point		1/2 P
3	Plug cover	Thermoplastic plastic PC		1
2	Socket body	Thermoplastic plastic		1
1	Plug body	Thermoplastic plastic		1
DWG	NAME OF PART	MATERIAL	NOTES	Q"TY
Marvin Zhang	DATE	2018/05/31	UNITS: MM SHEET: 1 OF 1 Tolerance	
CHK. Marvin Zhang	DATE	2018/07/12	SCALE: NONE 1.5:1 ( : ) REV: C	X. ±0.50
APP.	DATE		TITLE: OSTYK661 7.62mm With cover Series Side contact	X.XX ±0.30
			PART NO. OSTYK661XX130	X* ±1°
			DWG NO. OSTYK661XX130.dwg	

SIGN	DESCRIPTION	CHK.	DATE



ON-SHORE TECHNOLOGY, INC.