

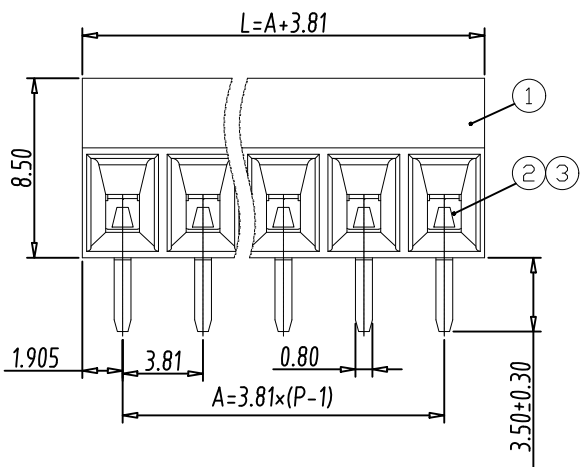
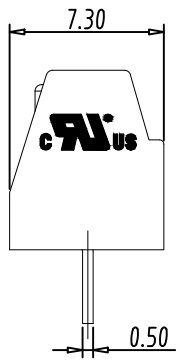
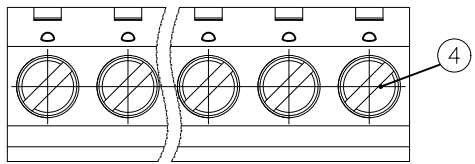


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

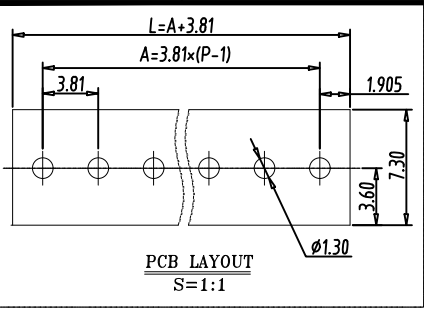

Technical Data:
Electrical
Pitch: 3.81mm
Voltage rating: 300V
Current rating: 10 Amps
Contact resistance: 5mΩ(max)
Withstanding Voltage: 1600VAC(1min) Test time=60sec/1pcs
Wire range: 16-26AWG
Wire strip length: 5-6mm
Mechanical:
Torque: 0.25Nxm
Operating temperature: -40°C to +105°C
Soldering temperature:
Temperature= 250°C±10°C /5 seconds max
Safety approval:
RoHS Compliance

Part No.:
OSTYOXX2150

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	2: Red
...	3: Orange
24 24 Poles	4: Yellow
	5: Green (Standard)
	6: Blue
	8: Grey

Nonstandard colors
Mins could apply

4	Screw	Steel / M2.0	Zn plated	1xN
3	Contact	Copper Alloy	Ni plated	1xN
2	Terminal	Copper Alloy	Tin plated	1xN
1	Body	PA66 UL94V-0		1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
DWG.	ZHT	DATE 2021.03.08	UNITS: MM	SHEET: 1 OF 1
CHK.	ARW	DATE 2021.03.08	SCALE: NONE 5:1 (:)	REV.: A
APP.	BHT	DATE 2021.03.08	TITLE: OSTYO SERIES 3.81MM	X. ±0.50
			PART NO. OSTYOXX2150	X.XX ±0.30
			DWG NO. OSTYOXX2150.DWG	X° ±1°

ON-SHORE TECHNOLOGY, INC.

REV	△	DESCRIPTION	CHK.	DATE
-----	---	-------------	------	------