




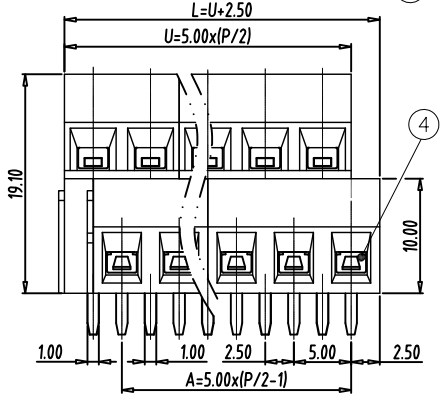


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

△	DESCRIPTION	CHK.	DATE
SIGN			



**PCB LAYOUT**  
S=1.5:1

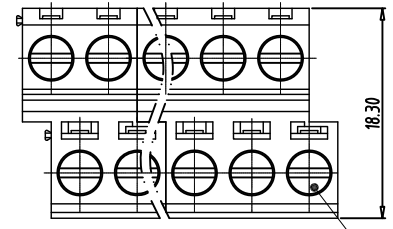

- Technical data**
- Nominal voltage: 300V/10A  
PITCH:5.0mm
  - Connection capacity:  
AWG 30-14
  - Insulation Withstanding Voltage:  
AC 2000V/MIN
  - Insulation Resistance:  
500MΩ or more at DC500V
  - Tightening torque:  
3.5Lb-In(4.0kgf.cm / 0.4N.m)
  - Screw thread: M3
  - Stripping length: 5-6mm
  - Operating temperature range:-40°C- 105°C  
Soldering temperature:250°C/5s
  - Safety approval:
  - RoHS Compliance

Part No.: **OSTYSXX0150**

<p>No. of Poles</p> <p>04 4 Poles</p> <p>06 6 Poles</p> <p>... ..</p> <p>48 48 Poles</p> <p>Nonstandard colors Mins could apply</p>	<p>COLOR</p> <p>0: Black</p> <p>2: Red</p> <p>3: Orange</p> <p>4: Yellow</p> <p>5: Green (Standard)</p> <p>6: Blue</p> <p>8: Grey</p>
---	---

5	SCREW	STEEL	M3/Zn Plated	P
4	BLOCK	BRASS	Ni Plated	P
3	LONG PIN	BRASS	Tin Plated	P/2
2	SHORT PIN	BRASS	Tin Plated	P/2
1	BODY	PA66 UL94V-0	ALL COLOR	
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
DWG	WF. Zhang	DATE	2018.10.08	UNITS: MM SHEET: 1 OF 1 Tolerance
CHK.	WF. Zhang	DATE	2018.10.08	SCALE: NONE 2:1 (:) REV: A X. ±0.50
APP.		DATE		TITLE: OSTYS 5.00mm Series X.X ±0.30
				2-Interlock "-" Slot Screw X.XX ±0.10
				PART NO. OSTYSXX0150 X° ±1°
				DWG NO. OSTYSXX0150.dwg