

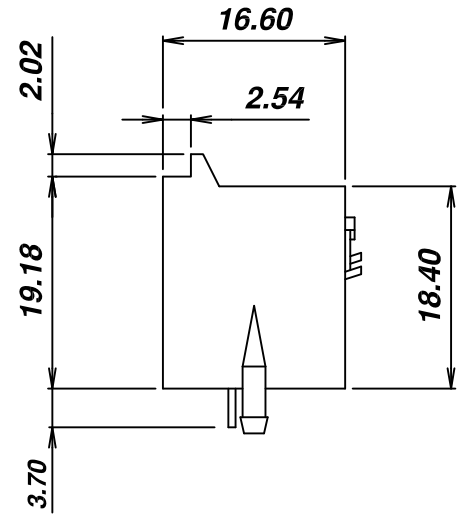


SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

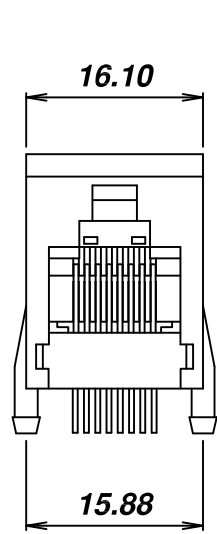

Material:

- Housing: PBT Glass Filled (UL 94V-0)
- Color: Medium Grey
- Spring Wire: 0.45mm Diameter Phosphor Bronze Gold Plating over Nickel
- Temp. Range: -40°C/+90°C
- Durability: 500 Mating cycles Min.

Electrical:

- Current rating: 1.5A Max.
- Voltage rating: 120V AC
- Insulation Resistance: >500 MΩ
- Contact Resistance: <20mΩ
- Dielectric Voltage: 1,000 Vrms for 60 sec. min.


RoHS Compliant

● Part Number


PJ008-8P8CX

Full Gold plating	1=6u"(STD) 2= 15u" 3=30u" 4=50u"
Selective Gold plating	6=6u"(STD) 7= 15u" 8=30u" 9=50u"

Non STD may require MOQ

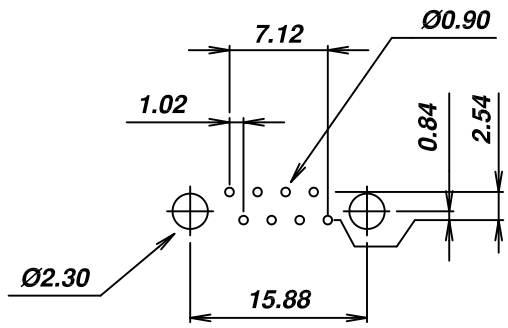

**PCB LAYOUT  
(Top View)**



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		PJ008 Series - 8 pos, 8 cont, side entry, thru hole			
PART NO.		PJ008-8P8CX		DWG NO. PJ008-8P8CX.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
Billy 2005.01.12	John 2005.01.12	Tony 2005.01.12	Steven 2005.01.12		
				Tolerance	
				UNIT: mm	
				SCALE: NONE	
				X.XX ±0.25	
				X.XXX ±0.13	
				X.XXXX ±0.05	
SHEET: 01/01				REV: A	