



SIGN	DATE	DESCRIPTION	APPROVER
▲	2014.11.12	Updated plating options	
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			





Material:

- Housing: PBT Glass Filled (UL 94V-0)
- Color: Black
- Spring Wire: 0.35mm Diameter Phosphor Bronze
Gold Plating over Nickel on contact
Tin Plating over Nickel on solder area
- Temp. Range: -40°C/+80°C
- Durability: 500 Mating cycles Min.

Electrical:

- Current rating: 1.5A Max.
- Voltage rating: 120V AC
- Insulation Resistance: 500 MΩMin.
- Contact Resistance: 30mΩMax.
- Dielectric Voltage: 1,000 Vrms for 60 sec. min.

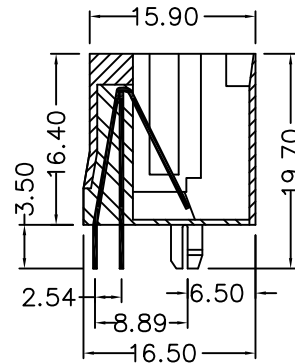


● Part Number

PJ012-8P8CX-F

Gold plating	1=6u"	2=15u"
	3=30u"	4=50u"

RoHS Compliant

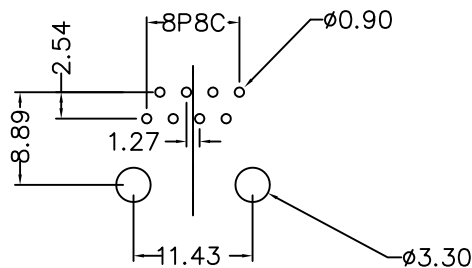

PCB LAYOUT / TOP VIEW

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		PJ012, 8 pos, 8 contact top entry, thru hole, with flange	
PART NO.	PJ012-8P8CX-F	DWG NO.	PJ012-8P8CX-F.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
Billy 2008.06.01	Johnn 2008.06.01	Tony 2008.06.01	Steven 2008.06.01
SHEET: 01/01		Tolerance	
		UNIT: mm	X.XX ±0.25
		SCALE: NONE	X.XXX ±0.13
		REV.: B	X.XXXX ±0.05