



SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



SHIELDED

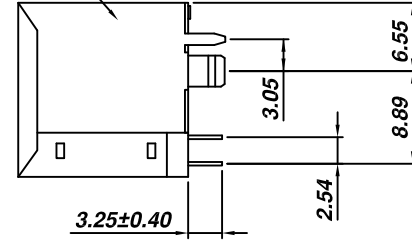

Material:

- Housing: PBT Glass Filled (UL 94V-0)
- Color: Black
- Spring Wire: 0.35mm Diameter Phosphor Bronze Gold Plating over Nickel
- Temp. Range: -40°C/+90°C
- Durability: 500 Mating cycles Min.

Electrical:


- Current rating: 1.5A Max.
- Voltage rating: 120V AC
- Insulation Resistance: 500 MΩ Min.
- Contact Resistance: 20mΩ Max.
- Dielectric Voltage: 1,000 Vrms for 60 sec. min.

● Part Number


PJ012-8P8CX-S

RoHS Compliant

Gold plating	1=6u"	2= 15u"
	3=30u"	4=50u"

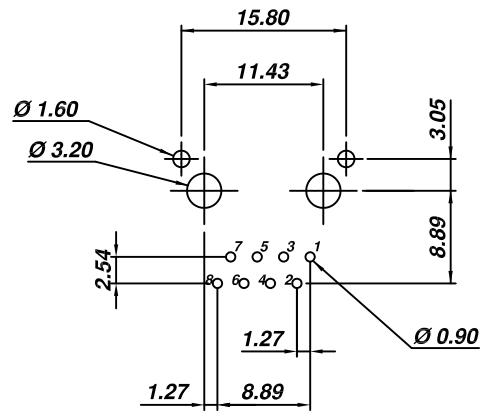

PCB LAYOUT
(Top View)



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		PJ012, 8 pos, 8 contact top entry, thru hole, with shield					
PART NO.		PJ012-8P8CX-S		DWG NO.		PJ012-8P8CX-S.DWG	
APPROVED		CHCKED	DESIGNED	DRAWN	CUST NO.		Tolerance
Billy 2006.02.07		Johnn 2006.02.07	Tony 2006.02.07	Steven 2006.02.07			X.XX ±0.25 X.XXX ±0.13 X.XXXX ±0.05
				SHEET: 01/01		UNIT: mm SCALE: NONE REV.: A	