


Specifications: \triangle
 Current rating: 3.0A AC/DC
 Voltage rating: 60V AC/DC
 Contact resistance: 20m ohm. max.
 Insulator resistance: 1000M ohm at V=100V. Min.
 Withstanding voltage: 1000V AC for one minute
 Operating temperature range: -25°C to +105°C




Material and Finish:
 Insulator: PBT (UL94V-0)
 Standard Color: Black
 Contact: Beryllium Copper (Becu), Gold Flash
 Sleeve Barrel: Brass, Tin Plated

How To Order \triangle

SAXXX0X0
 3: Gold Flash (Clip)
 4: Gold Plated 10u" (Clip)
 3: Space: 7.62mm
 6: Space: 15.24mm
 No. Of Contacts \triangle

Note 1: With middle bar (18-48P)

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space	Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space	
04	5.08	2.54	10.18	7.62	03	24	30.48	27.94	17.80	15.24	06	
06	7.62	5.08	10.18	7.62		28	35.56	33.02	17.80	15.24		
08	10.16	7.62	10.18	7.62		32	40.64	38.10	17.80	15.24		
10	12.70	10.16	10.18	7.62		40	50.80	48.26	17.80	15.24		
14	17.78	15.24	10.18	7.62		42	53.34	50.80	17.80	15.24		
16	20.32	17.78	10.18	7.62		48	60.96	58.42	17.80	15.24		
18	22.86	20.32	10.18	7.62								
20	25.40	22.86	10.18	7.62								
24	30.48	27.94	10.18	7.62								
28	35.56	33.02	10.18	7.62								

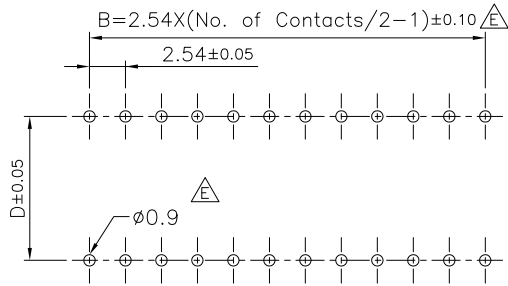

PCB Layout

RoHS Compliant

F	11-FEB-2022	ADD/Modify PIN \triangle	MEI	DRAWN:	GENERAL TOLERANCE:	ON-SHORE TECHNOLOGY, INC.	DESCRIPTION:	SIZE
E	16-MAR-2020	\triangle	JAMIE	Allen	.X=±0.38 .XX=±0.25 \triangle			
D	17-May-2016		Blake Huang	CHECKED:	UNIT: MM	2.54mm IC Socket Machine Pin	PART NO:	
C	08-SEP-2009		Allen	Jerry Chen	SCALE: 1:1			
B	05-SEP-2008		Allen	APPROVAL:	SHEET: 1/1	SAXXX0X0		
A	31-JUL-2008		Allen	Mike Wu	PROJECTION:			
REV	DATE	FILE	BY					