

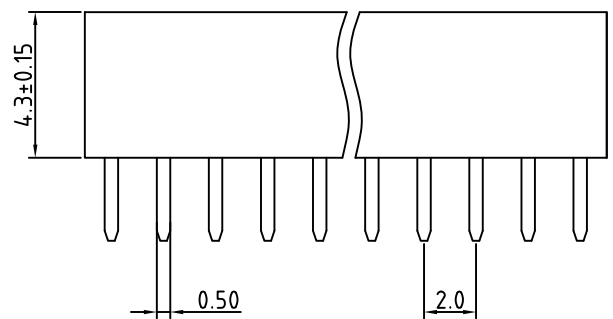


SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

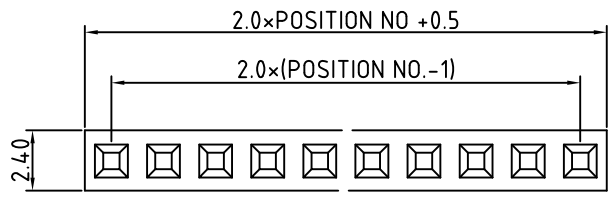

RECOMMENDED P. C. B. LAYOUT

Material:

- Insulator: Nylon 9T, UL94V-0
- Color: Black
- Contact: Phosphor Bronze
- Plating: Gold flash over 50u" Ni

Electrical:

- Current: 1A
- Voltage: 250V AC(r.m.s.)
- Insulation Resistance: 5000MΩmin
- Contact Resistance: 20mΩMax
- Dielectric Voltage: 500VAC/minute
- Operating Temperature: -40°C ~ +105°C
- Max Processing Temperature: 230°C for 60 Seconds
260°C for 10 Seconds

RoHS Compliant

Part Number

SHA-XXG

↑
of circuits

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		SHA Series, 2.00mm, single row female header, vertical, thru hole			
PART NO.		SHA-XXG		DWG NO. SHA-XXG.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	1200	
Shi Jun 2007.03.15	Marvin 2007.03.15	Marvin 2007.03.15	Marvin 2007.03.15	Tolerance	
				UNIT: mm	
				SCALE: NONE	
				X° ±0.20	
				X.XX ±0.10	
				X° ±1°	
				SHEET: 01/01	
				REV.: A	