


Specifications:
 Current Rating: 2.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m ohm max.
 Insulation Resistance: 1000M ohm min.
 Withstanding Voltage: 500V AC/minute
 Operating Temperature Range: -40°C ~ +105°C




Material and Finish
 Insulator: High Temp Plastic (Nylon 9T UL94V-0)
 Insulator Color: Black
 Terminal: Phosphor Bronze
 Plated: Gold or Tin or Plated
 Add P as suffix for placement peg
 How to Order
 SHB-SXXX-45XX

BLANK: Tube (STD)
 RP: Tape/reel w/pad
 TP: Tube with pad
 TR: Tape/reel

1: Gold Flash
 5: Tin Plated
 715: Gold Plated 15u"
 No. of Contacts


Dimension :

Circuits	A	B	C	Circuits	A	B	C	Circuits	A	B	C	Circuits	A	B	C
04	4.50	2.00	2.00	24	24.50	22.00	20.00	44	44.50	42.00	40.00	64	64.50	62.00	60.00
06	6.50	4.00	2.00	26	26.50	24.00	22.00	46	46.50	44.00	42.00	66	66.50	64.00	62.00
08	8.50	6.00	4.00	28	28.50	26.00	24.00	48	48.50	46.00	44.00	68	68.50	66.00	64.00
10	10.50	8.00	6.00	30	30.50	28.00	26.00	50	50.50	48.00	46.00	70	70.50	68.00	66.00
12	12.50	10.00	8.00	32	32.50	30.00	28.00	52	52.50	50.00	48.00	72	72.50	70.00	68.00
14	14.50	12.00	10.00	34	34.50	32.00	30.00	54	54.50	52.00	50.00	74	74.50	72.00	70.00
16	16.50	14.00	12.00	36	36.50	34.00	32.00	56	56.50	54.00	52.00	76	76.50	74.00	72.00
18	18.50	16.00	14.00	38	38.50	36.00	34.00	58	58.50	56.00	54.00	78	78.50	76.00	74.00
20	20.50	18.00	16.00	40	40.50	38.00	36.00	60	60.50	58.00	56.00	80	80.50	78.00	76.00
22	22.50	20.00	18.00	42	42.50	40.00	38.00	62	62.50	60.00	58.00				

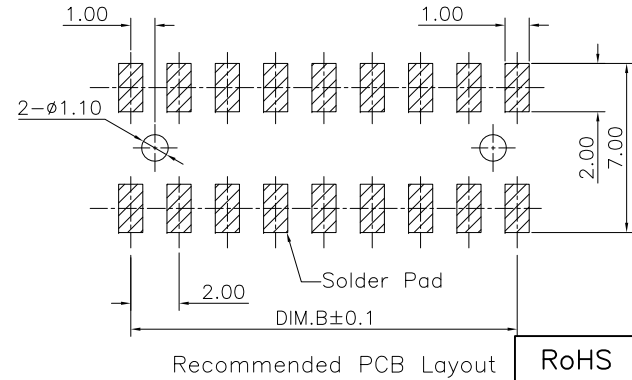

RoHS Compliant

REV	DATE	FILE	BY	DRAWN:	CHECKED:	APPROVAL:	GENERAL TOLERANCE:	UNIT:	SCALE:	SHEET:	PROJECTION:
F				JERRY			.X=±0.20 .XX=±0.15	MM	1:1	1/1	⊕
E	18-Feb-2022	Add Dim.D Size	Lisy Liu								
D	27-Dec-2019	Add. Section	Jerry Chen								
C	27-Dec-2019	PCH>PCX	Jerry Chen								
B	31-Oct-2018		Jamie Wang								
A	16-MAY-2006		Cel King								
REV	DATE	FILE	BY	RORY							


ON-SHORE TECHNOLOGY, INC.
 DESCRIPTION: 2.0mm PCB Socket Double Row SMD Type
 PART NO: SHB-SXXX-45XX
 SIZE: