

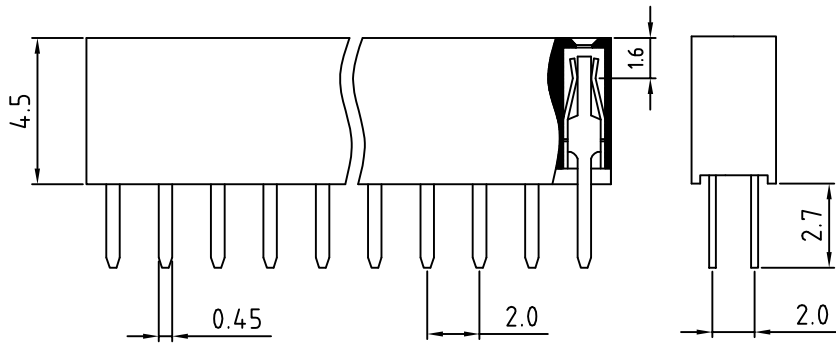


SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

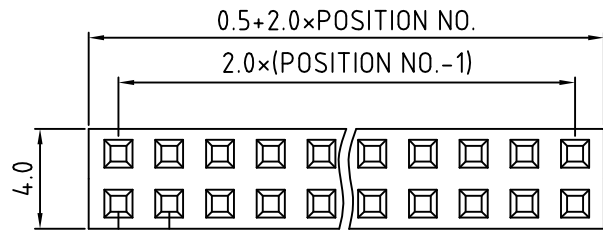

RECOMMEND P. C. B. LAYOUT

Material:

- Insulator: Nylon 66, glass reinforced, UL94V-0
- Color: Black
- Contact: Phosphor Bronze
- Plating: Gold flash over 50u" Ni

Electrical:

- Current: 1A
- Voltage: 250V AC(r.m.s.)
- Insulation Resistance: >1000 MΩ
- Contact Resistance: <30mΩ
- Dielectric Voltage: 1000VAC/minute
- Operating Temperature: -40°C ~ +105°C

RoHS Compliant

Part Number

SHB-XXG

of circuits

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		SHB Series, 2.00mm, dual row female header, vertical, thru hole					
PART NO.		SHB-XXG		DWG NO.		SHB-XXG.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	1200		Tolerance	
Shi Jun 2007.03.15	Marvin 2007.03.15	Marvin 2007.03.15	Marvin 2007.03.15			UNIT: mm	X.X ±0.20
						SCALE: NONE	X.XX ±0.10
				SHEET: 01/01	REV.: A	X* ±1°	