

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	





### SPECIFICATIONS

Current Rating : 1.5A  
 Operation Temperature: -40° C to +105°C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)

Contact Material : Brass  
 Contact plating : Au over 50u" Ni  
 RoHS Compliant

### Dimensions list

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
2*1	2.0	0	2*16	32.0	30.0
2*2	4.0	2.0	2*17	34.0	32.0
2*3	6.0	4.0	2*18	36.0	34.0
2*4	8.0	6.0	2*19	38.0	36.0
2*5	10.0	8.0	2*20	40.0	38.0
2*6	12.0	10.0	2*21	42.0	40.0
2*7	14.0	12.0	2*22	44.0	42.0
2*8	16.0	14.0	2*23	46.0	44.0
2*9	18.0	16.0	2*24	48.0	46.0
2*10	20.0	18.0	2*25	50.0	48.0
2*11	22.0	20.0	2*26	52.0	50.0
2*12	24.0	22.0	2*27	54.0	52.0
2*13	26.0	24.0	2*28	56.0	54.0
2*14	28.0	26.0	2*29	58.0	56.0
2*15	30.0	28.0	2*30	60.0	58.0

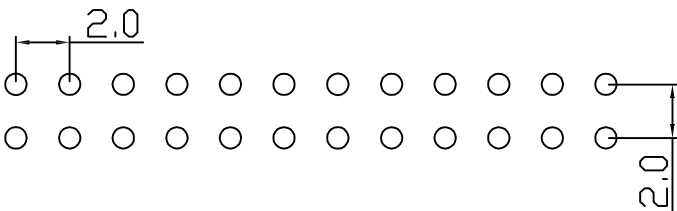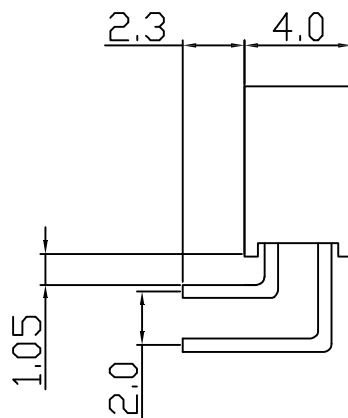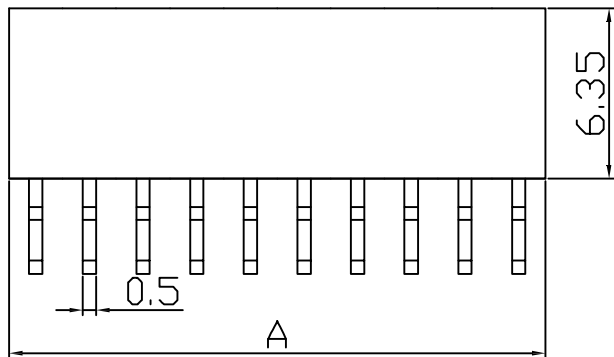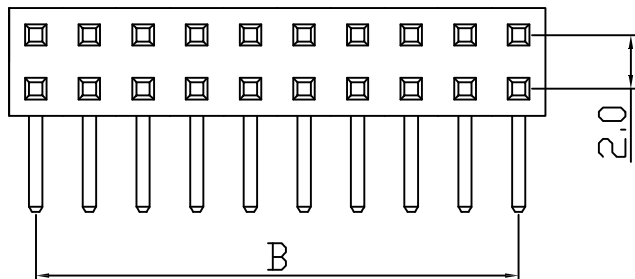

Part Number

SHD-XXG

Total # of circuits

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		SHD Series, 2.00mm, dual row female header, right angle			
PART NO.		SHD-XXG		DWG NO. SHD-XXG.DWG	
APPROVED		CHECKED	DESIGNED	DRAWN	
			Betty 2014.06.25	Betty 2014.06.25	
		SHEET: 01/01		Tolerance	
		UNIT: mm		X.X ±0.20	
		SCALE: NONE		X.XX ±0.15	
		REV.: A		X.XXX ±0.05	
				X* ±1*	