


SIGN	DATE	DESCRIPTION	APPROVER
△	2012.10.03	USB 2.0 detail added	SHIN
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

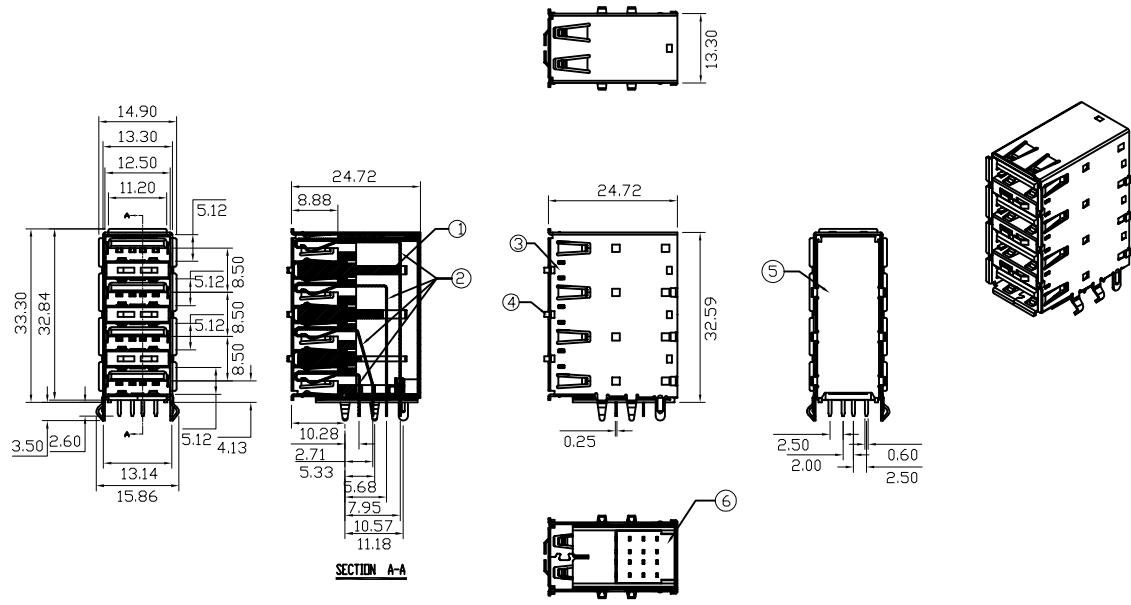

MATERIAL:  
 TERMINAL: PHOSPHOR BRONZE  
 HOUSING: P.B.T+30% G.F(UL94V-0) RATED

SPECIFICATION  
 CONTACT RESISTANCE: 30mΩ (MAX)  
 INSULATION RESISTANCE: 1000MΩ (MIN)  
 DIELECTRIC: WITHSTANDING VOLTAGE: 750V AC AT SEA LEVEL  
 MATING FORCE: 35N MAX  
 UNMATING FORCE: 10N MIN.

RoHS Compliant

PART NUMBER:  
**USB-A4HSXX**

COLOR:  
 B: Black  
 W: White

PLATING:  
 6: Selective Au Flash/50u" Ni  
 8: Selective 30u" Au/50u" Ni (USB 2.0)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

**OST** ON-SHORE TECHNOLOGY, INC.

TITLE USB - A type, Horizontal, thru hole, 4 ports

PART NO. USB-A4HSXX DWG NO. USB-A4HSXX.DWG

APPROVED JUSTIN 2006.07.03 CHECKED JUSTIN 2006.07.03 DESIGNED JUSTIN 2006.07.03 DRAWN JUSTIN 2006.07.03

3471

Tolerance

UNIT: mm X.X ±1%  
 SCALE: NONE X.XX ±0.38/.015  
 REV: A X.XXX ±0.25/.010  
 X.XXX ±0.13/.005

SHEET: 01/01

NO.	NAME	MATERIAL	FINISH	QTY
1	HOUSING	P.B.T.	BLACK	1
2	PIN TERM	PHOS. BRONZE	GOLD-TIN PLATED Gold:1~3u"; Ni:40~60u"; TIN:120u" (100% pure Tin of lead free plating)	16
3	SHELL	BRASS,0.4mm	TIN PLATED	1
4	SHELL	BRASS,0.3mm	TIN PLATED	3
5	SHELL	SPCC,0.3mm	NICKEL PLATED	1
6	SPACER	P.B.T.	BLACK	1