
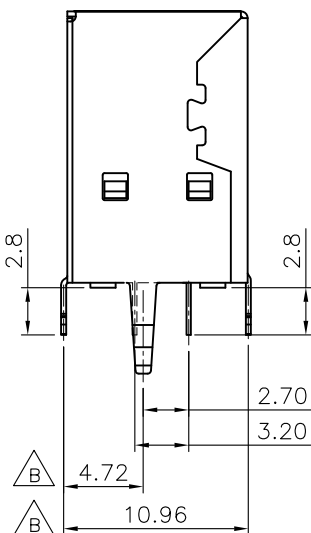
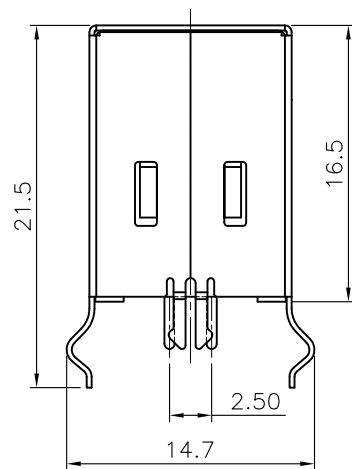


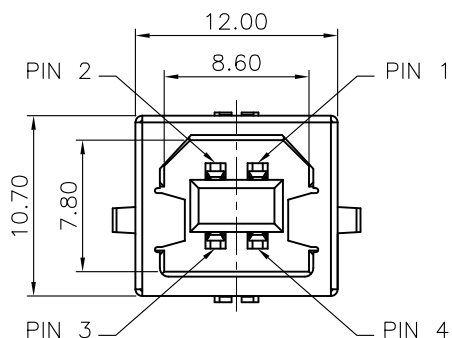

Specifications:


Current Rating:1.0A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:20m ohm.Max.
Insulation Resistance:1000M ohm.Min.
Withstanding Voltage:750V AC/Minute
Operating Temperature Range:-40°C To +105°C

Material and Finish:

Insulator:PBT (UL94V-0)
Contact:Copper Alloy
Plating:Gold Plated on Contact Area,Tin Plated on Solder Tail.
Shell:Copper Alloy,Nickel Plated

How To Order USB-B1KSXX

6: Standard Selective Gold Plated
8: Gold Plated 30u"
B: Black
W: White

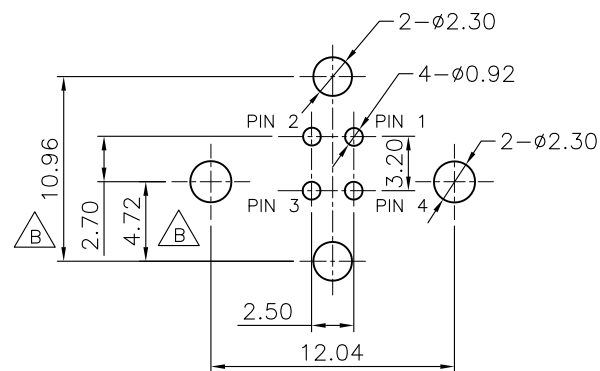

Recommended P.C.B Layout

RoHS Compliant

F				DRAWN: Andrew	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15 .XXX=±0.10	OST ON-SHORE TECHNOLOGY, INC.		
E								
D								
C				CHECKED: Bill He	UNIT: MM	DESCRIPTION: USB B TYPE PCB FEMALE STRAIGHT		SIZE A4
B	14-May-2022	B modify shell and pcb layout	Andrew		SCALE: 1:1			
A	09-May-2022		Andrew	APPROVAL: Bill He	SHEET: 1/1	PART NO: USB-B1KSXX		
REV	DATE	FILE	BY		PROJECTION:			