

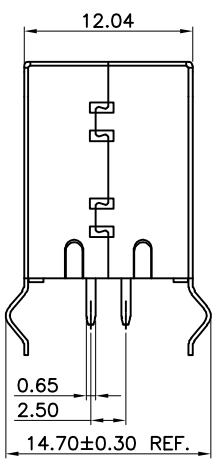
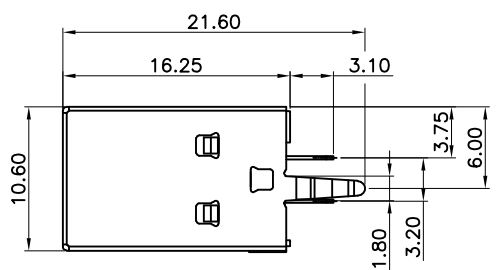



1 2 3 4 5

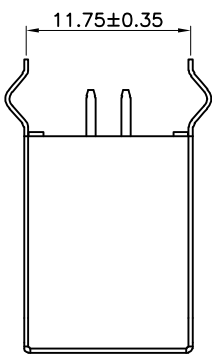



Specifications:
 Current Rating:1.5A Amps.
 Voltage Rating:30V AC/DC
 Contact Resistance:30m ohm.Max.
 Insulation Resistance:1000M ohm.Min.
 Withstanding Voltage:500V AC/Minute
 Operating Temperature Range:-20°C To +60°C
 Material and Finish:
 Insulator:PBT (UL94V-0)
 Contact:Phosphor Bronze
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Copper Alloy,Nickel Plated
 How To Order
 USB-B1VSXX

6:Selective Gold Plated (STD)
 8:Gold Plated 30u"
 W:White B:Black



P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 ON-SHORE TECHNOLOGY, INC.	
E				Jamie Wang	.X=±0.25 .XX=±0.13		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				Jerry Chen	SCALE:	USB B TYPE PCB FEMALE STRAIGHT	
B				APPROVAL:	SHEET: 1 / 2	PART NO:	USB-B1VSXX
A	1-Jul-2022		Sea	Mike Wu	PROJECTION:		
REV	DATE	FILE	BY				

A

B

C

D