
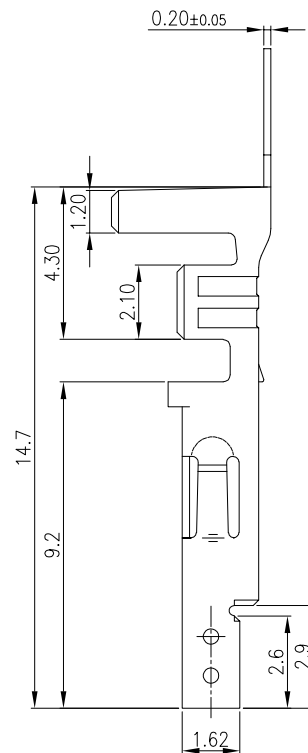
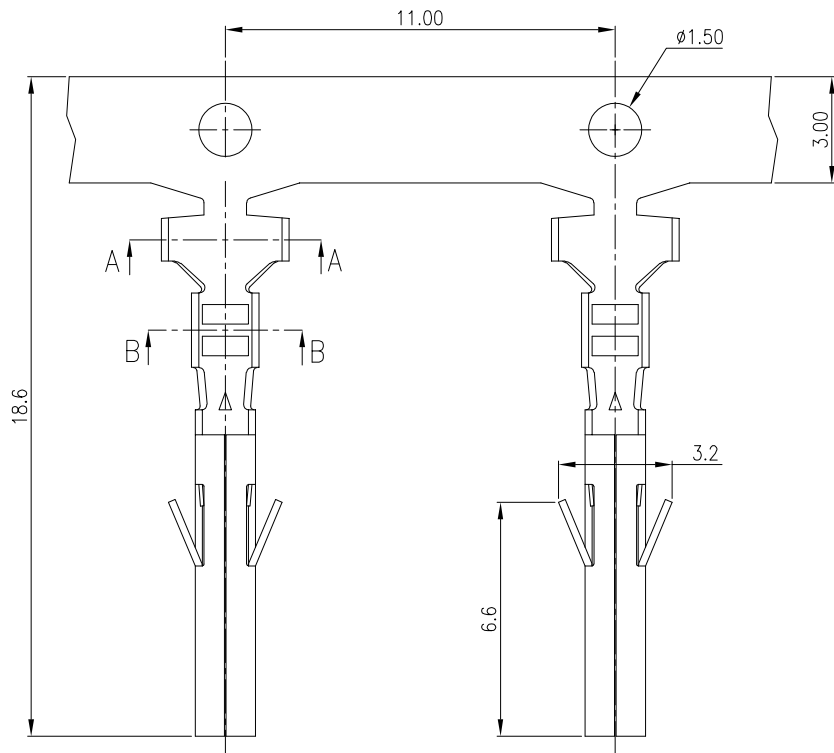




Specifications:
 Current Rating:9.0 AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:10m ohm. max.
 Withstanding Voltage:1,500V AC/minute
 Operating Temperature Range:-40°C~+105°C
 Application Wires:AWG16 to 26
 Mates With 420C1P Series Housing

Material and Finish
 Contact:Brass or Phosphor Bronze
 Finish:Tin Plated

How To Order
 420CP-T-X
 Code



CODE	Wire Gauge	Dimension				Material	Reel Q'ty
		A	B	C	D		
1	AWG #22~28	2.3	2.3	1.8	1.65	Brass	5,000 PCS
2	AWG #18~24	3.6	4.5	1.9	2.3	Brass	4,000 PCS
3	AWG #22~28	2.3	2.3	1.8	1.65	Phosphor Bronze	5,000 PCS
4	AWG #18~24	3.6	4.5	1.9	2.3	Phosphor Bronze	4,000 PCS
5	AWG #16	3.6	4.5	2.3	2.7	Brass	4,000 PCS
6	AWG #16	3.6	4.5	2.3	2.7	Phosphor Bronze	4,000 PCS

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 ON-SHORE TECHNOLOGY, INC.	DESCRIPTION: 4.2mm Plug Crimp Terminal	SIZE A4
E				Art				
D				CHECKED:	UNIT: MM	PART NO: 420CP-T-X		
C	01-DEC-2010	Amend Stru.	Art		SCALE: 1:1			
B	24-NOV-2009	Amend dim.	Art		SHEET: 1 / 2			
A	09-DEC-2008		Art	APPROVAL:	PROJECTION: 			
REV	DATE	FILE	BY	Mike Wu				